



CALIFORNIA AUDIO TECHNOLOGY



2025 US Catalog



Consumer Products

Architectural

CAT		Retail Price Each*
100	Spec Sheet	\$ 1,950
200	Spec Sheet	\$ 2,850
300	Spec Sheet	\$ 3,300
400	Spec Sheet	\$ 5,000
600	Spec Sheet	\$ 11,700
S2	Spec Sheet	\$ 4,150
S3	Spec Sheet	\$ 5,700
S4	Spec Sheet	\$ 7,250
CAT Elite		Retail Price Each*
200EX	Spec Sheet	\$ 3,950
400EX	Spec Sheet	\$ 6,050
700	Spec Sheet	\$ 9,950
800	Spec Sheet	\$ 21,650
S5	Spec Sheet	\$ 6,450
CAT MBX		Retail Price Each*
900	Spec Sheet	\$ 13,900
1000	Spec Sheet	\$ 28,350
S7	Spec Sheet	\$ 5,500
S8	Spec Sheet	\$ 6,450
S10	Spec Sheet	\$ 27,200
S11	Spec Sheet	\$ 32,000

Soundbars Information

Freestanding

	Retail Price Each*
Trinity	Spec Sheet \$ 31,650
Yosemite	Spec Sheet \$ 150,650
Sequoia	Spec Sheet \$ 201,700
FX	Spec Sheet \$ 508,050
FXX	Spec Sheet \$ 1,506,300
Miramar	Spec Sheet \$ 35,200
Diablo	Spec Sheet \$ 90,700

Custom Information

Electronics

	Retail Price Each*
200.6 Amplifier	Spec Sheet \$ 9,995
300.8 Amplifier	Spec Sheet \$ 24,000
1250.2 Amplifier	Spec Sheet \$ 43,850
12x12 DSP	Spec Sheet \$ 22,150

Services

Off-Site Engineering	Information \$ 250 / hr
On-Site Engineering	Information \$ 7,500 / day

Sample Systems

Two Channel	Information
Cinema	Information

**Prices effective 1/1/2025-12/31/2025. Alternative product configurations and custom pricing may vary.*

CAT 100 IW




The CAT 100 loudspeaker system integrates a CAT 6.5" curvilinear Poly-Mica cone woofer driver with the CAT 30mm silk-dome tweeter. Constructed with an HDF enclosure and a 1/2" thick CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

[Click here to see a few grille examples](#)

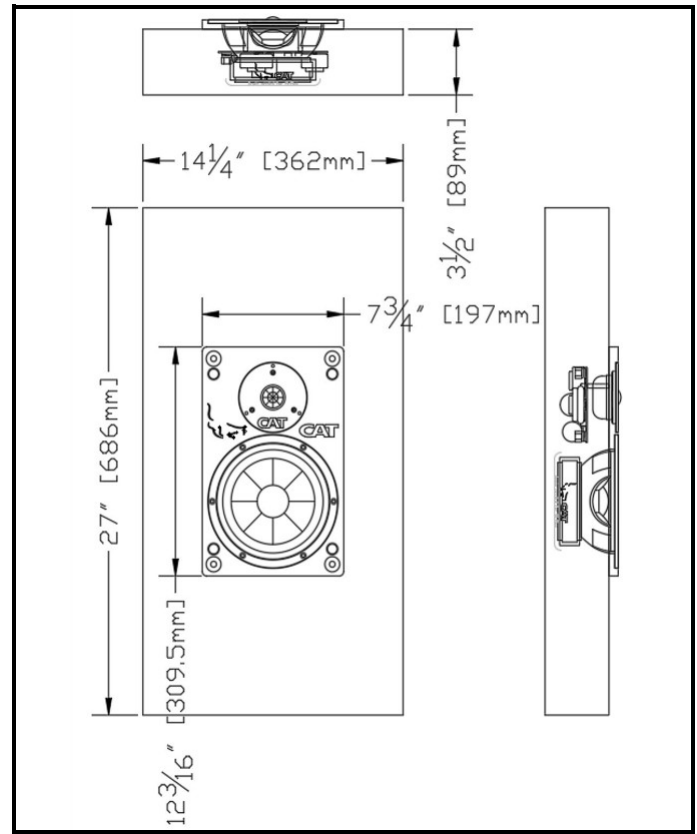

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT 100 IW	Channels 1
Maximum SPL @ 1m 119dB	Frequency Response 32Hz-22kHz
Minimum Amplifier Power 250W @ 4Ω	Maximum Amplifier Power 650W @ 4Ω
Nominal Impedance 4Ω	Sensitivity 89dB

Recommended Amplification

[CAT 200.6 Amplifier](#)

[CAT 300.8 Amplifier](#)

[Previous Page](#)


[Return To Product List](#)

CAT 100 - Other Configurations




Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.


In-Cabinet / Bookshelf

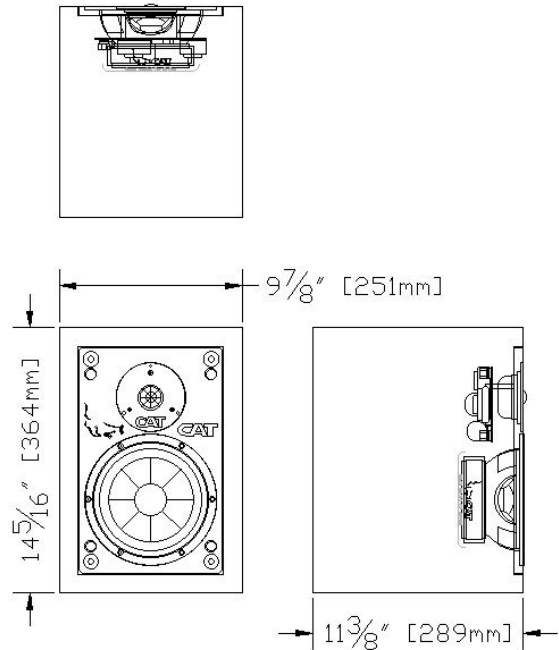

In-Ceiling

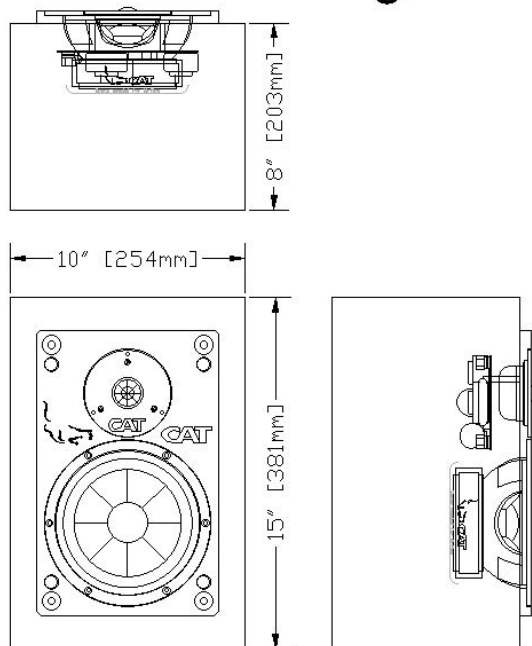

Angled (30° Example)

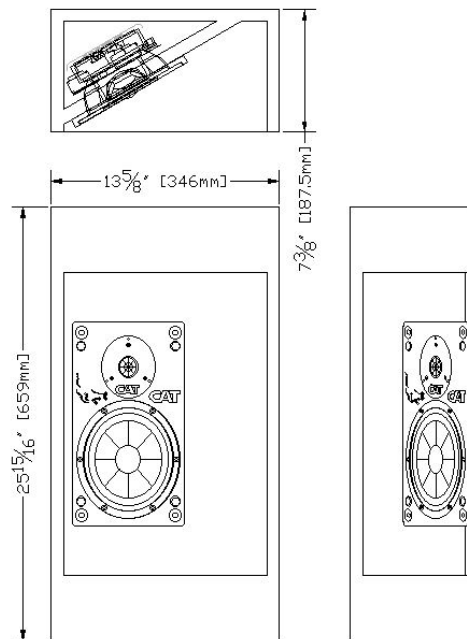

*Custom charge applies

[Previous Page](#)

[Return To Product List](#)

CAT 200 IW




The CAT 200 loudspeaker system integrates a CAT 8.5" curvilinear aluminum cone woofer driver with the CAT 30mm silk-dome tweeter. Constructed with an HDF enclosure and a 1/2" thick CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

[Click here to see a few grille examples](#)

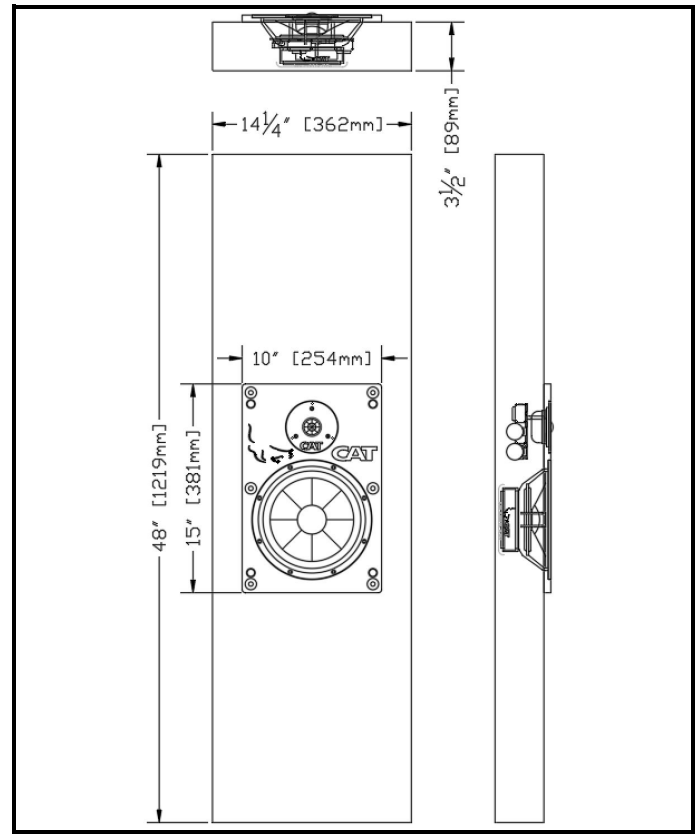

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT 200 IW	Channels 1
Maximum SPL @ 1m 119dB	Frequency Response 29Hz-22kHz
Minimum Amplifier Power 250W @ 4Ω	Maximum Amplifier Power 650W @ 4Ω
Nominal Impedance 4Ω	Sensitivity 89dB

Recommended Amplification

[CAT 200.6 Amplifier](#)

[CAT 300.8 Amplifier](#)

[Previous Page](#)


[Return To Product List](#)

CAT 200 - Other Configurations




Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.


In-Cabinet / Bookshelf

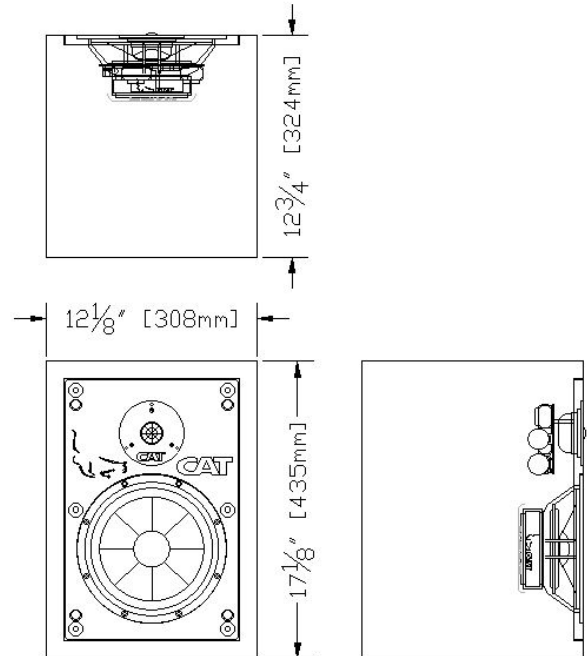

In-Ceiling

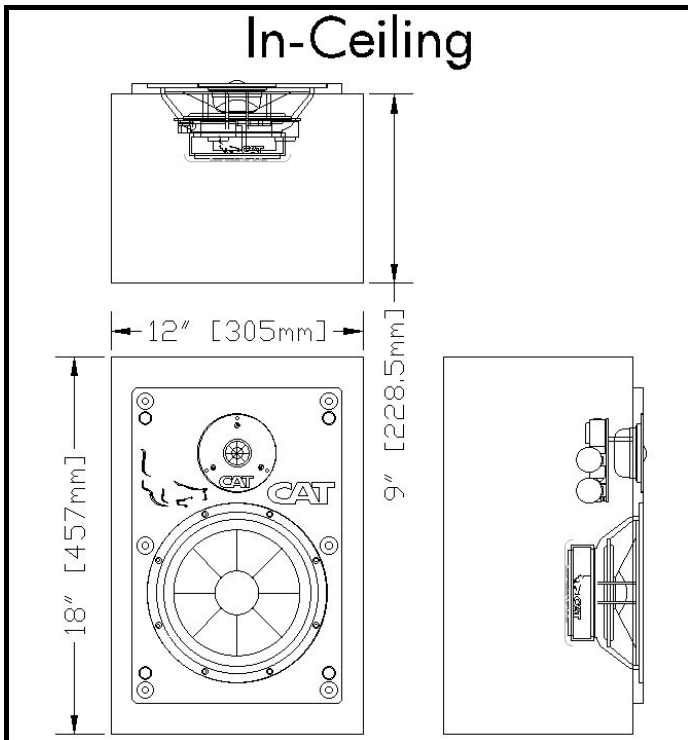

Angled (30° Example)

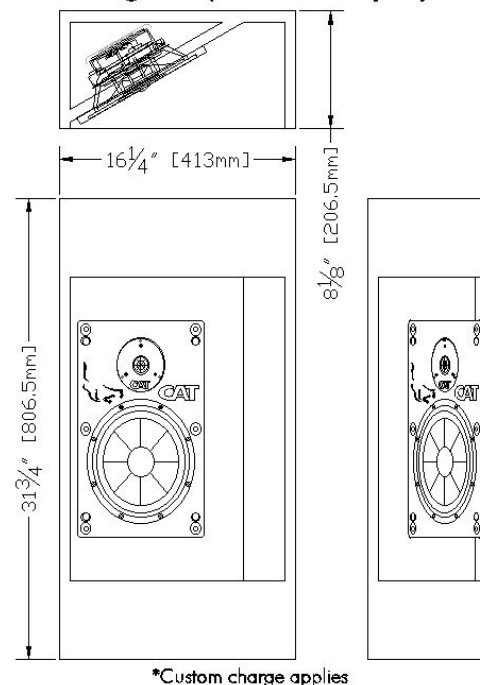

*Custom charge applies

[Previous Page](#)

[Return To Product List](#)

CAT 300 IW




The CAT 300 loudspeaker system integrates twin CAT 5.5" curvilinear Poly-Mica cone woofer drivers with the CAT 30mm silk-dome tweeter. Constructed with an HDF enclosure and a 1/2" thick CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

[Click here to see a few grille examples](#)

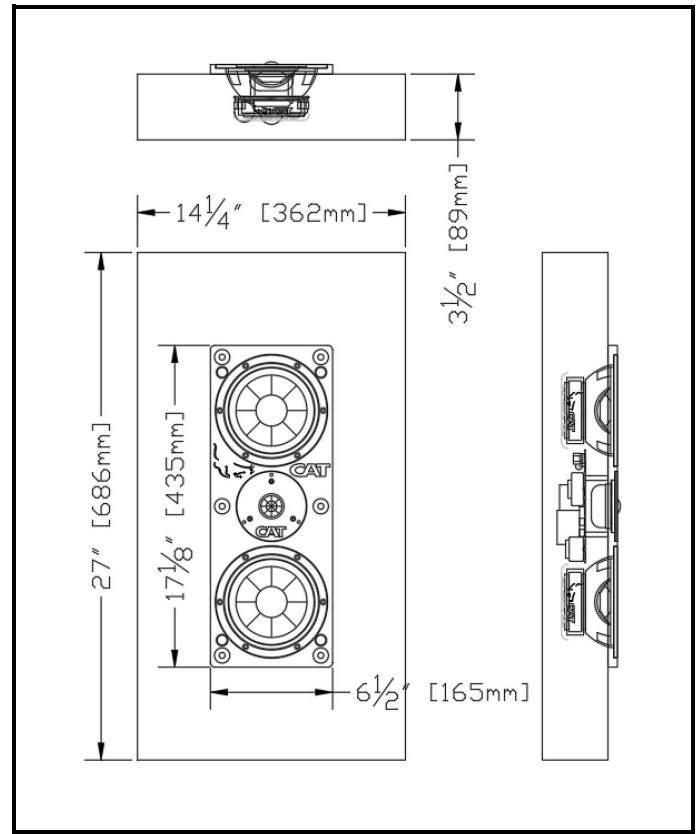

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT 300 IW	Channels 1
Maximum SPL @ 1m 119dB	Frequency Response 32Hz-22kHz
Minimum Amplifier Power 250W @ 4Ω	Maximum Amplifier Power 650W @ 4Ω
Nominal Impedance 4Ω	Sensitivity 89dB

Recommended Amplification

[CAT 200.6 Amplifier](#)

[CAT 300.8 Amplifier](#)

[Previous Page](#)


[Return To Product List](#)

CAT 300 - Other Configurations




Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.


In-Cabinet / Bookshelf

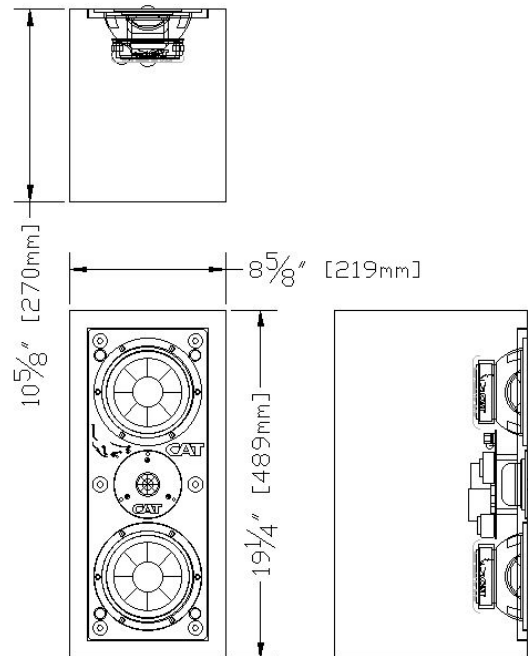

In-Ceiling

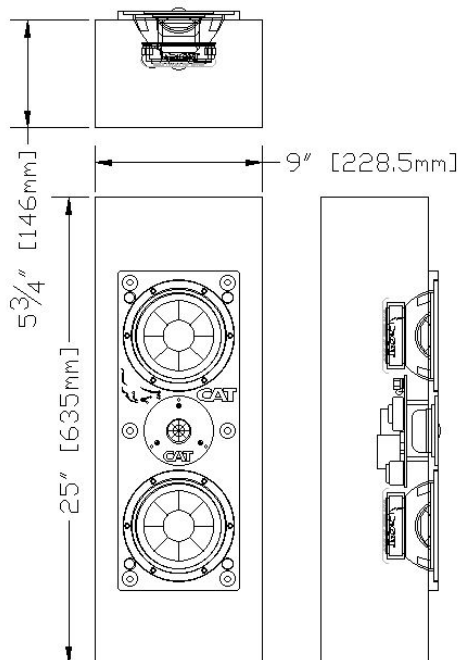

Angled (30° Example)

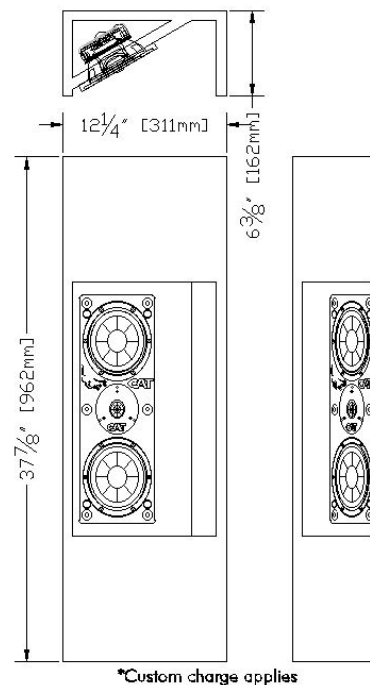

[Previous Page](#)

[Return To Product List](#)

CAT 400 IW




The CAT 400 loudspeaker system integrates twin CAT 6.5" curvilinear Aluminum cone woofer drivers with the CAT 30mm silk-dome tweeter. Constructed with an HDF enclosure and a 1/2" thick CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

[Click here to see a few grille examples](#)

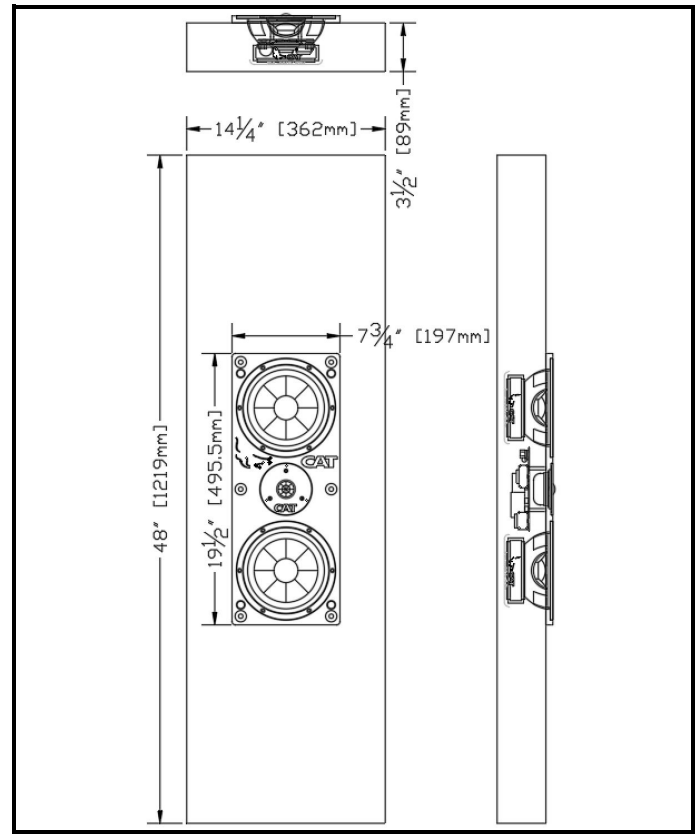

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT 400 IW	Channels 1
Maximum SPL @ 1m 119dB	Frequency Response 30Hz-22kHz
Minimum Amplifier Power 250W @ 4Ω	Maximum Amplifier Power 650W @ 4Ω
Nominal Impedance 4Ω	Sensitivity 89dB

Recommended Amplification

[CAT 200.6 Amplifier](#)

[CAT 300.8 Amplifier](#)




[Previous Page](#)

[Return To Product List](#)

CAT 400 - Other Configurations



Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.

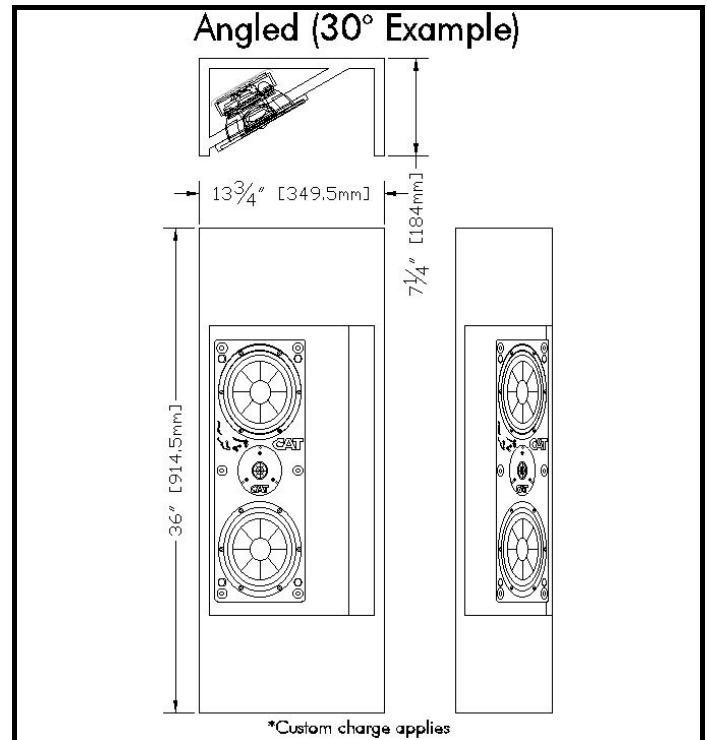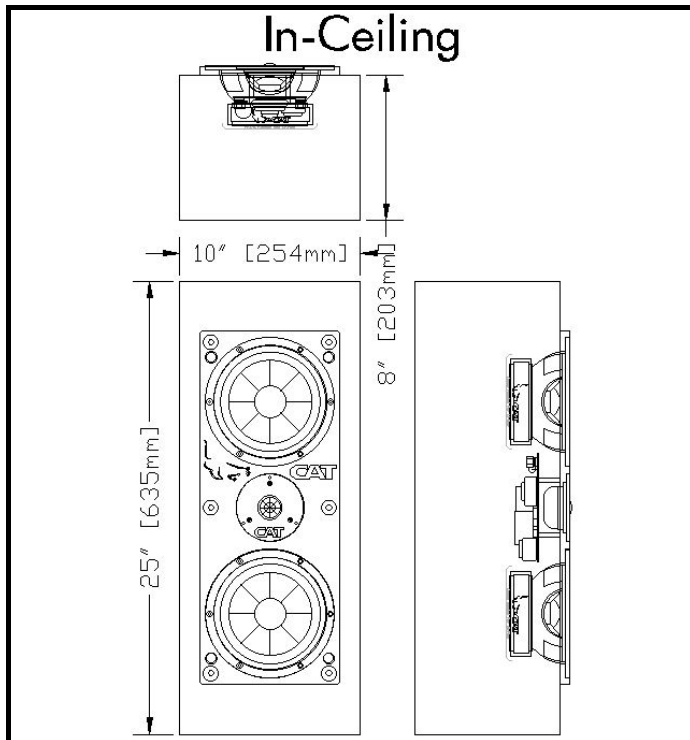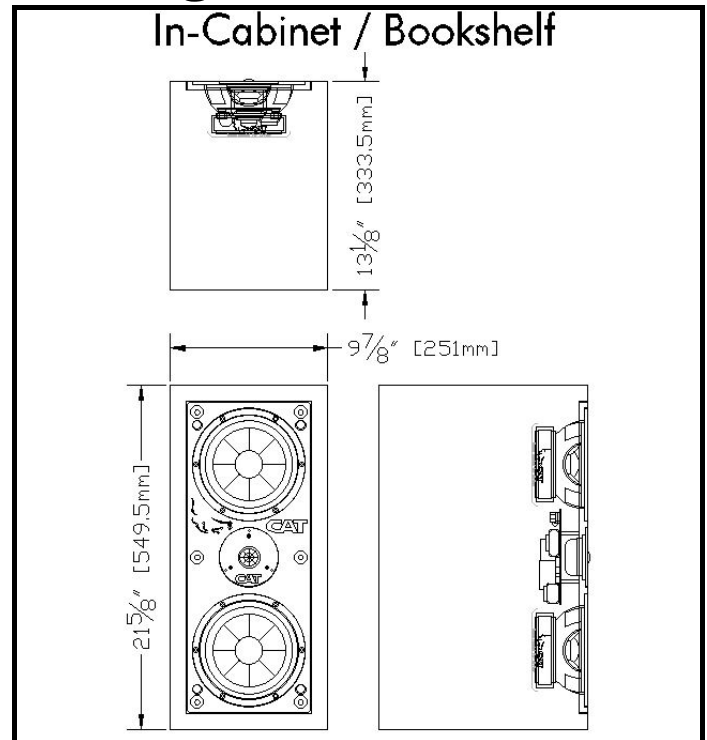

[Previous Page](#)

[Return To Product List](#)


CAT 600 IW



The CAT 600 loudspeaker system integrates twin CAT 8" and twin CAT 5.5" curvilinear aluminum cone woofer drivers with a CAT 30mm silk-dome tweeter. Constructed with an HDF enclosure and a 1/2" thick CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

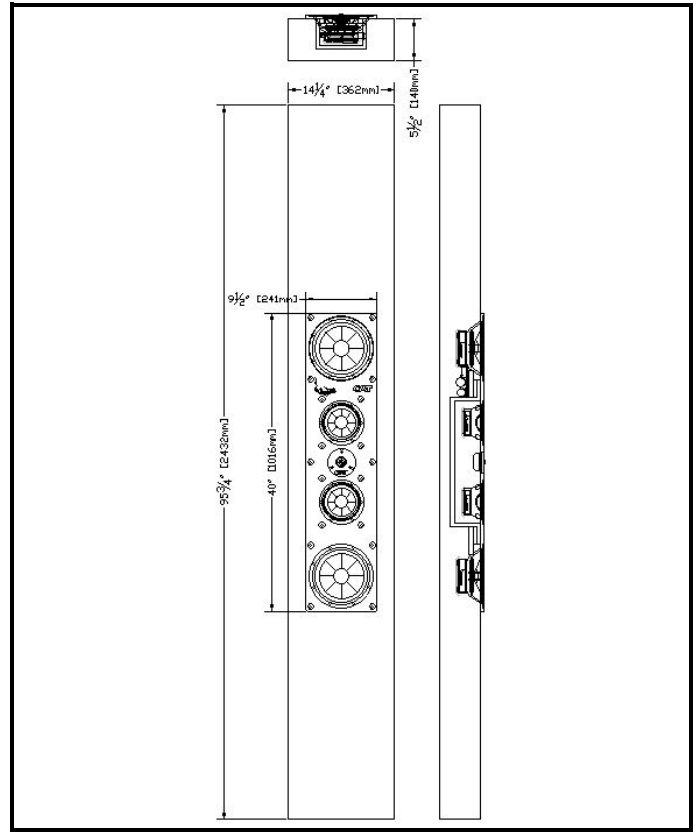

[Click here to see a few grille examples](#)

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT 600 IW	Channels 2
Maximum SPL @ 1m 119dB	Frequency Response 29Hz-24kHz
Minimum Amplifier Power 250W @ 4Ω	Maximum Amplifier Power 650W @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

Recommended Amplification

[CAT 200.6 Amplifier](#)

[CAT 300.8 Amplifier](#)




[Previous Page](#)

[Return To Product List](#)

CAT 600 - Other Configurations



Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.

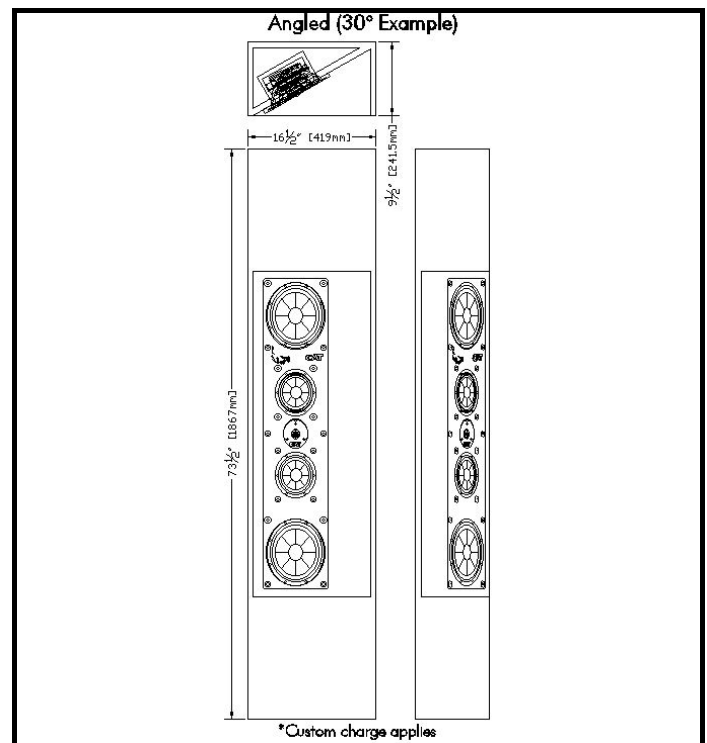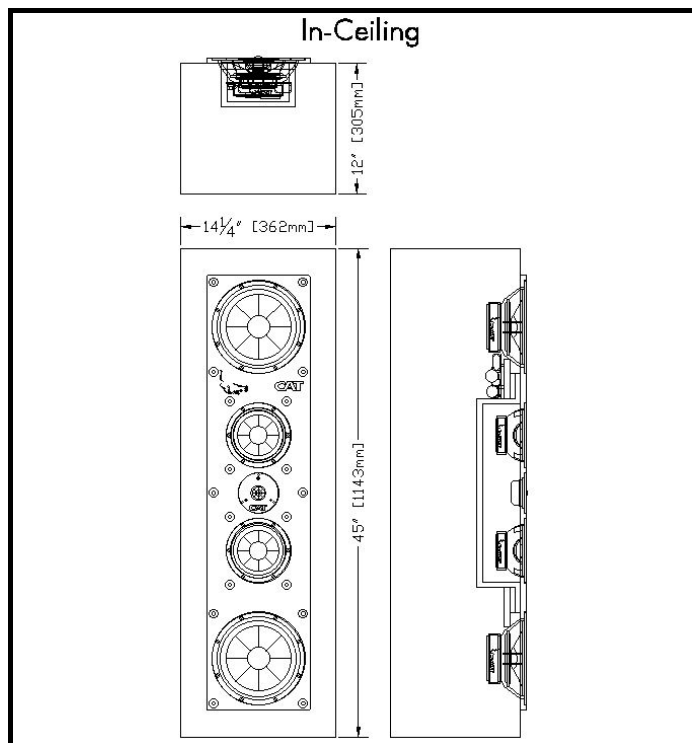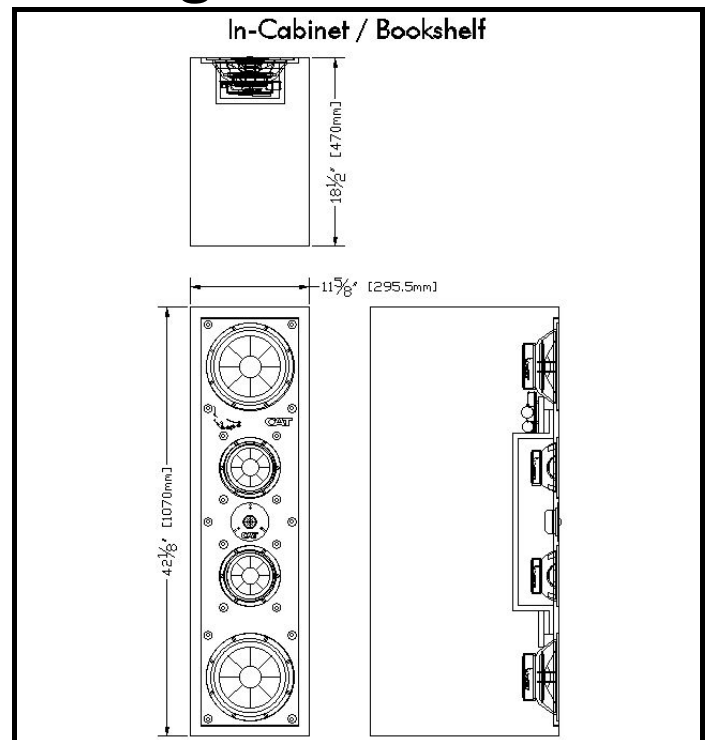

[Previous Page](#)

[Return To Product List](#)


CAT S2 IW



This 12" curvilinear aluminum cone subwoofer will accurately reproduce low frequencies down to 22Hz. Constructed with an HDF enclosure and a 1/2" CAT MBX105 ultra high-density driver baffle.

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

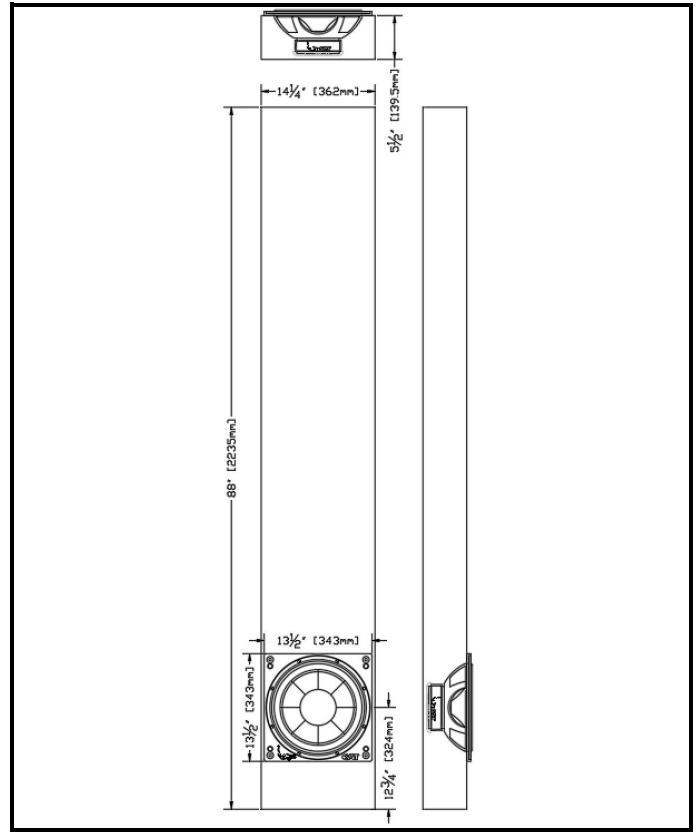

[Click here to see a few grille examples](#)

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT S2 IW	Channels 1
Maximum SPL @ 1m 126dB	Frequency Response 22Hz-1kHz
Minimum Amplifier Power 250W @ 4Ω	Maximum Amplifier Power 650W @ 4Ω
Nominal Impedance 4Ω	Sensitivity 89dB

Recommended Amplification

[CAT 200.6 Amplifier](#)

[CAT 300.8 Amplifier](#)

[Previous Page](#)


[Return To Product List](#)

CAT S2 - Other Configurations




Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.


In-Cabinet / Bookshelf

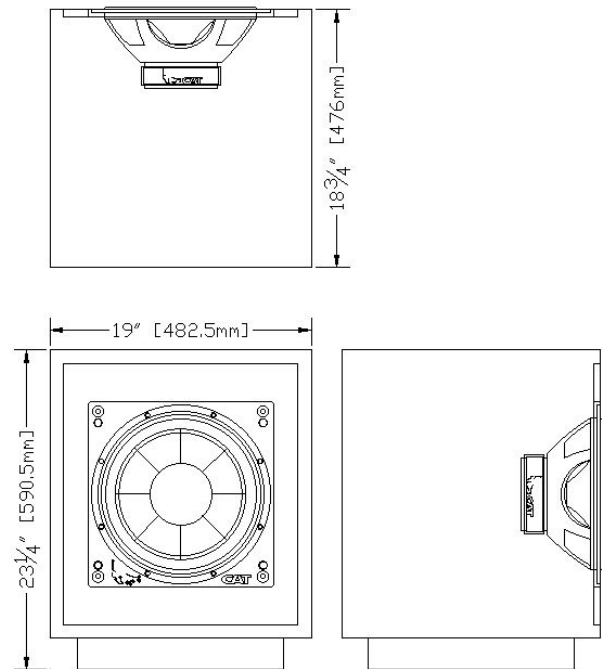

In-Ceiling

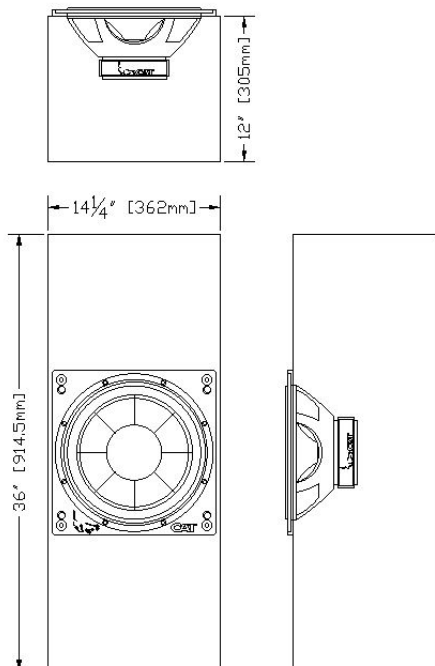

C-Shaped

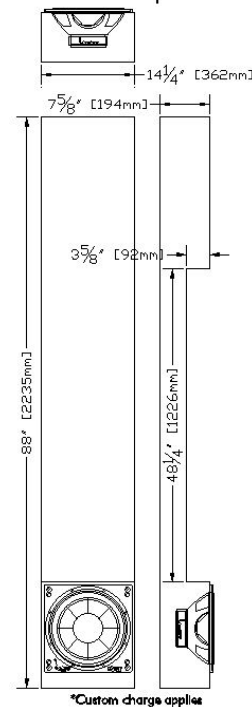

[Previous Page](#)

[Return To Product List](#)


CAT S3 IW



This 15" aluminum cone subwoofer will accurately reproduce low frequencies down below 15Hz. An oversized ceramic magnet provides massive power handling capabilities. Constructed with an HDF enclosure and a 1" thick CAT MBX105 ultra high-density driver baffle (CAT Proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

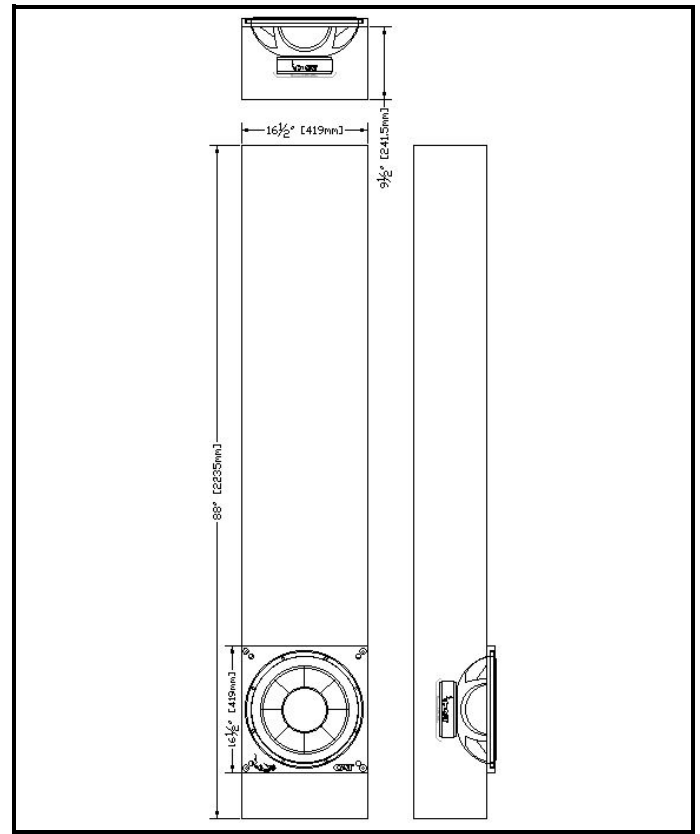

[Click here to see a few grille examples](#)

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT S3 IW	Channels 1
Maximum SPL @ 1m 125dB	Frequency Response 17Hz-1000kHz
Minimum Amplifier Power 300W @ 4Ω	Maximum Amplifier Power 650W @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

Recommended Amplification

CAT 300.8 Amplifier




[Previous Page](#)

[Return To Product List](#)

CAT S3 - Other Configurations



Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.

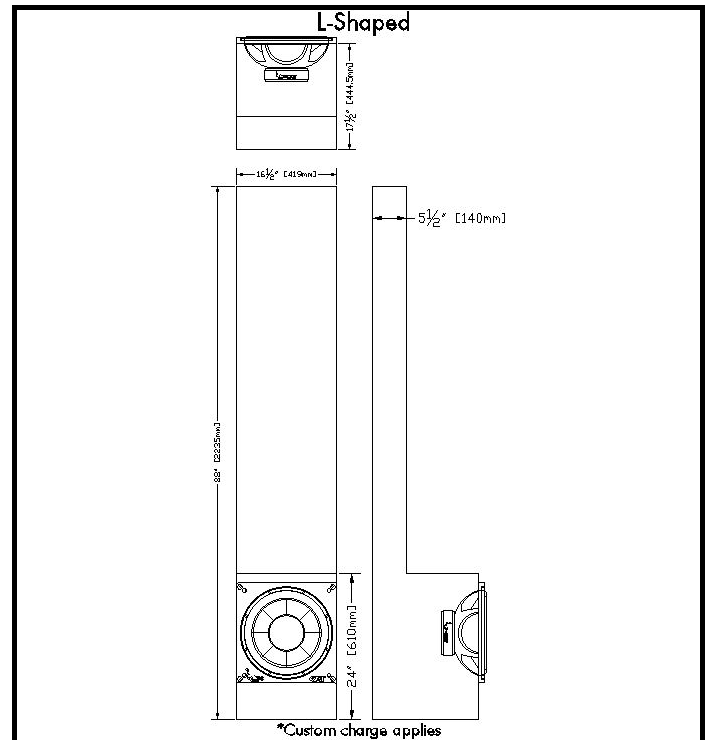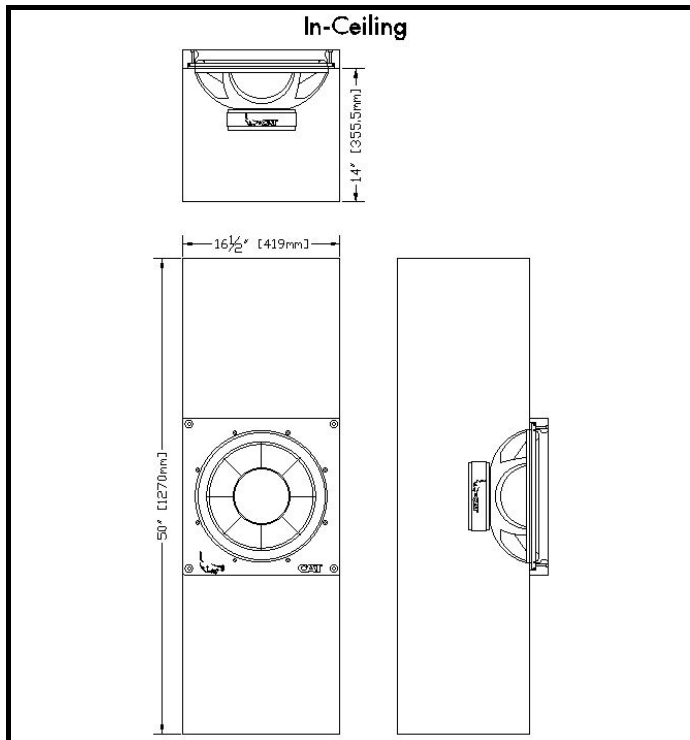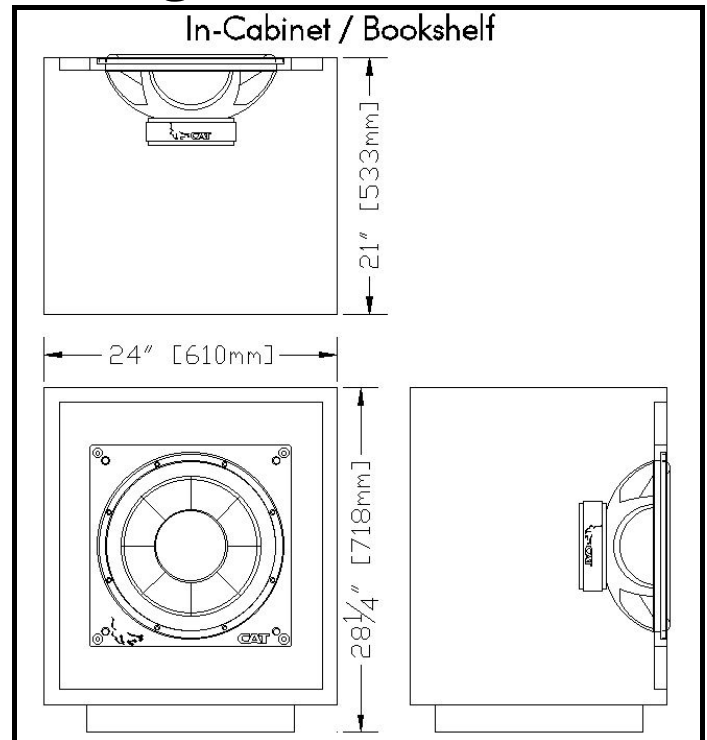

[Previous Page](#)

[Return To Product List](#)


CAT S4 IW



This 18" curvilinear aluminum cone subwoofer will accurately reproduce low frequencies down below 15Hz. An oversized ceramic magnet provides massive power handling capabilities. Constructed with an HDF enclosure and a 1" thick CAT MBX105 ultra high-density driver baffle (CAT Propriety fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

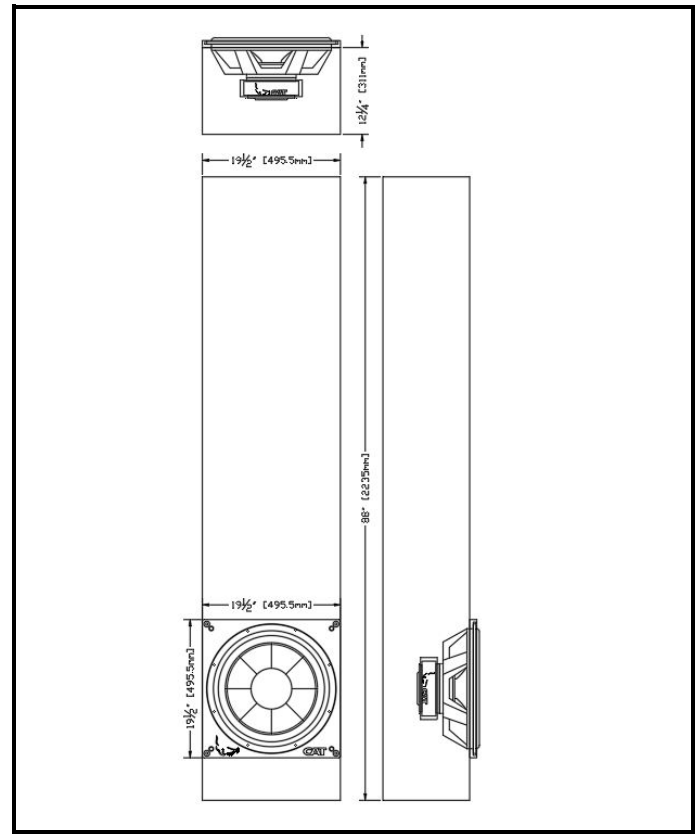

[Click here to see a few grille examples](#)

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT S4 IW	Channels 1
Maximum SPL @ 1m 128dB	Frequency Response 10Hz-1000kHz
Minimum Amplifier Power 300W @ 4Ω	Maximum Amplifier Power 650W @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

Recommended Amplification

CAT 300.8 Amplifier




[Previous Page](#)

[Return To Product List](#)

CAT S4 - Other Configurations



Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.

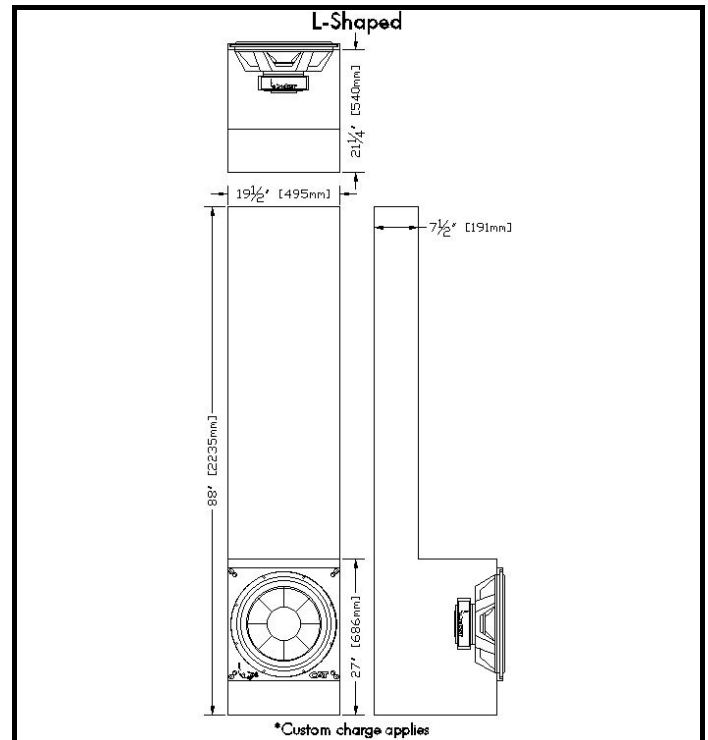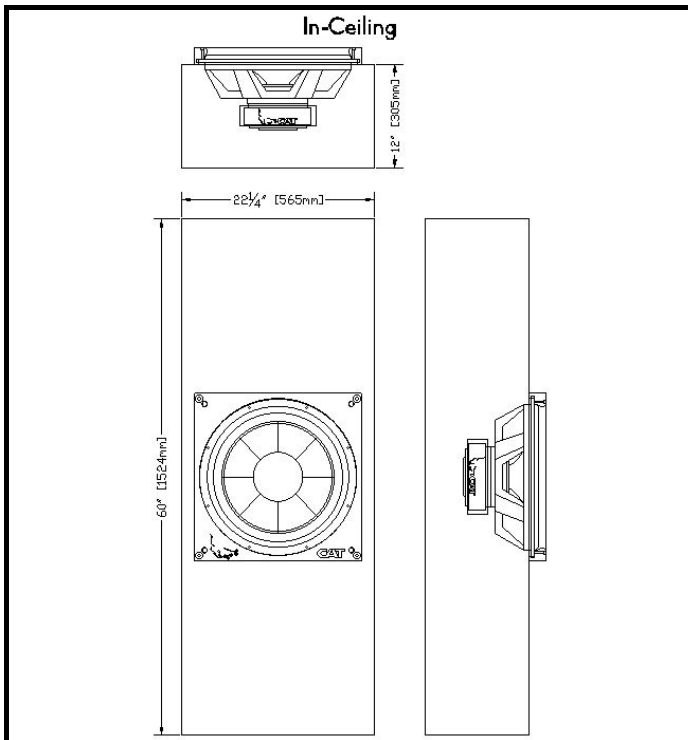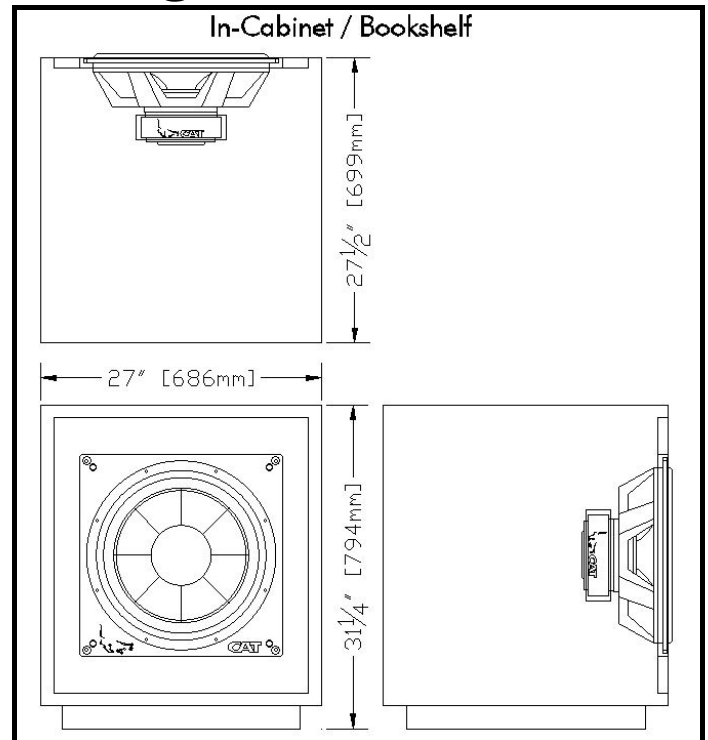

[Previous Page](#)

[Return To Product List](#)

CAT Elite 200EX IW




The CAT Elite 200EX loudspeaker system integrates a CAT Elite 8.5" copper phase plug curvilinear aluminum cone woofer driver with the CAT Elite 30mm silk-dome tweeter, providing the CAT Elite 200EX with extended SPL and the most critical performance benefits of the renowned CAT MBX tweeter. Constructed with an HDF enclosure and a 1" thick CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

[Click here to see a few grille examples](#)

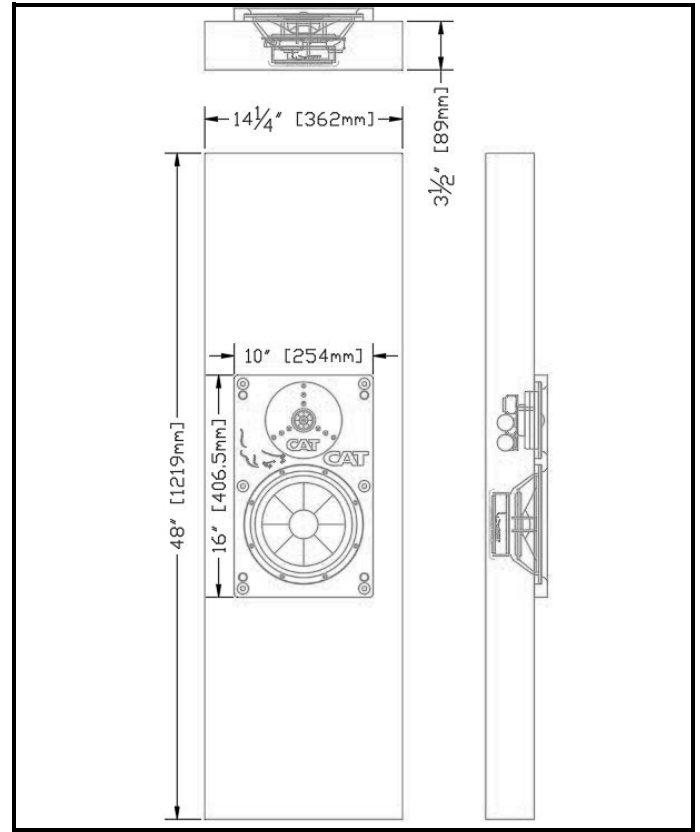

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT Elite 200EX IW	Channels 1
Maximum SPL @ 1m 125dB	Frequency Response 30Hz-24kHz
Minimum Amplifier Power 300W @ 4Ω	Maximum Amplifier Power 650W @ 4Ω
Nominal Impedance 4Ω	Sensitivity 89dB

Recommended Amplification

CAT 300.8 Amplifier

[Previous Page](#)


[Return To Product List](#)

CAT Elite 200EX - Other Configurations




Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.


In-Cabinet / Bookshelf

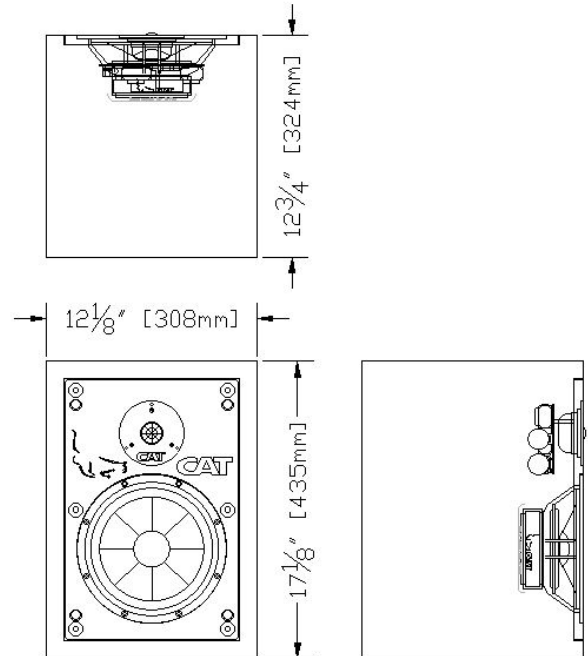

In-Ceiling

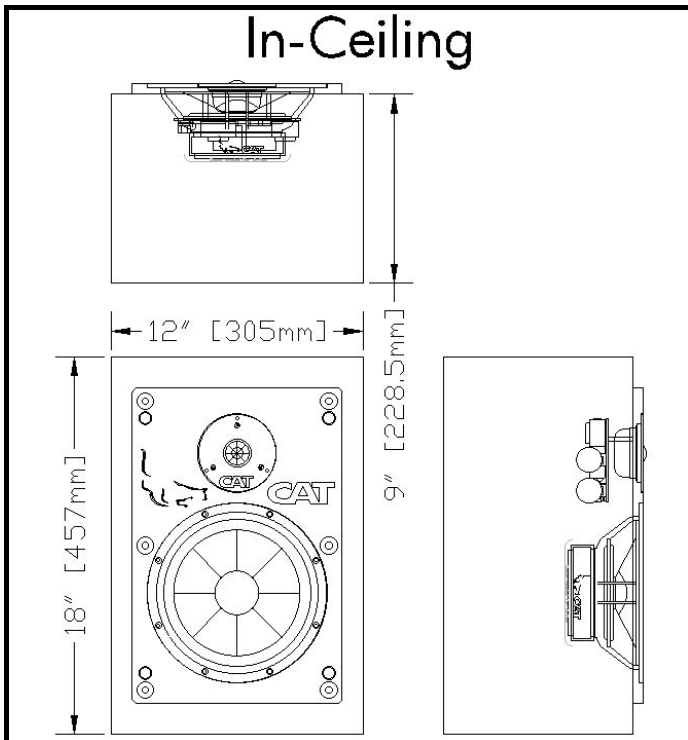

Angled (30° Example)

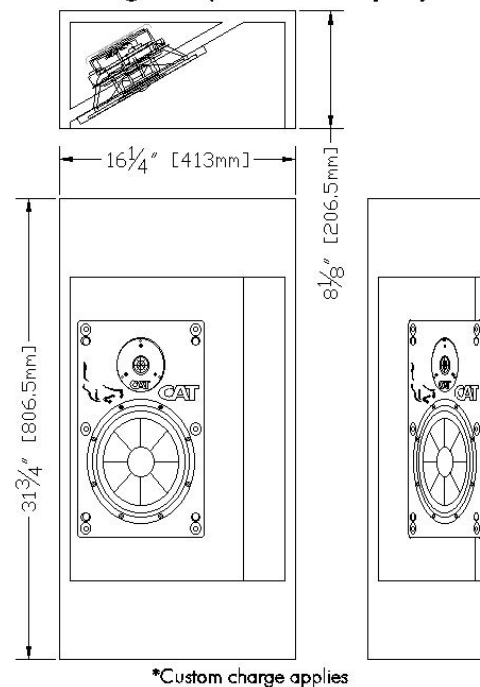

[Previous Page](#)

[Return To Product List](#)

CAT Elite 400EX IW




The CAT Elite 400EX loudspeaker system integrates twin CAT 6.5" curvilinear Poly-Mica cone woofer drivers with the CAT Elite 30mm silk-dome tweeter. Constructed with an HDF enclosure and a 1" thick CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

[Click here to see a few grille examples](#)

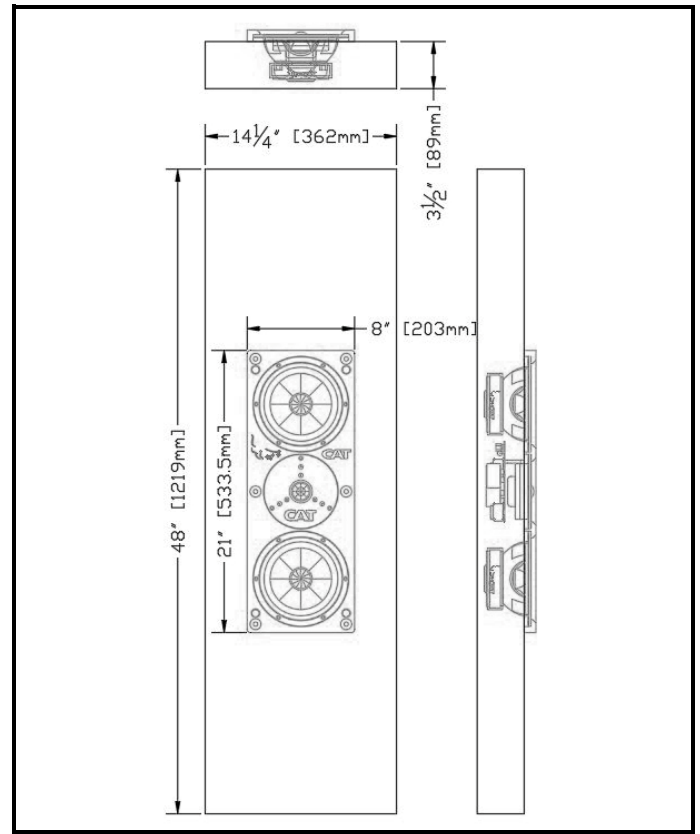

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT Elite 400EX IW	Channels 1
Maximum SPL @ 1m 125dB	Frequency Response 30Hz-22kHz
Minimum Amplifier Power 300W @ 4Ω	Maximum Amplifier Power 650W @ 4Ω
Nominal Impedance 4Ω	Sensitivity 89dB

Recommended Amplification

CAT 300.8 Amplifier

[Previous Page](#)


[Return To Product List](#)

CAT Elite 400EX - Other Configurations




Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.


In-Cabinet / Bookshelf

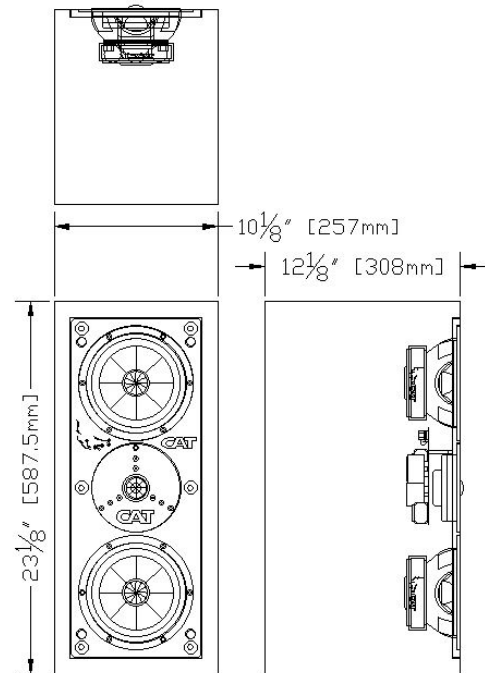

In-Ceiling

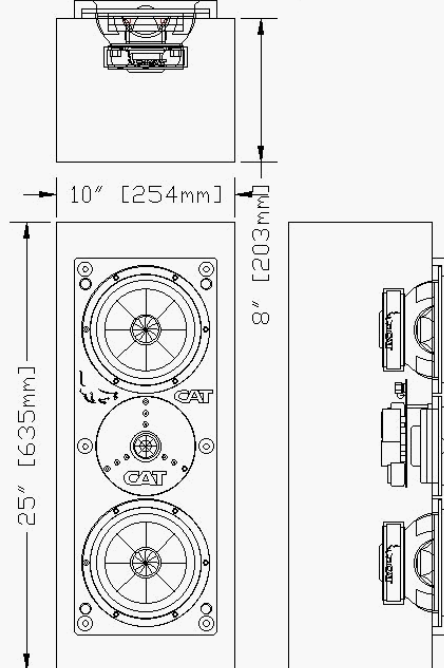

Angled (30° Example)

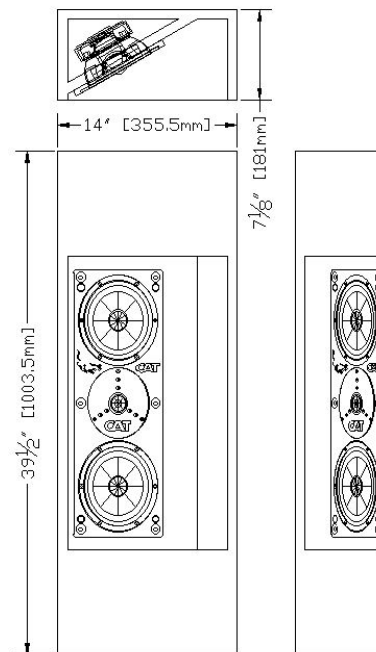

*Custom charge applies

[Previous Page](#)

[Return To Product List](#)


CAT Elite 700 IW



The CAT Elite 700 loudspeaker system integrates twin CAT Elite 6.5" copper phase plug curvilinear aluminum cone woofer drivers with the CAT Elite 30mm silk-dome tweeter. Constructed with an HDF enclosure and a 1" thick CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

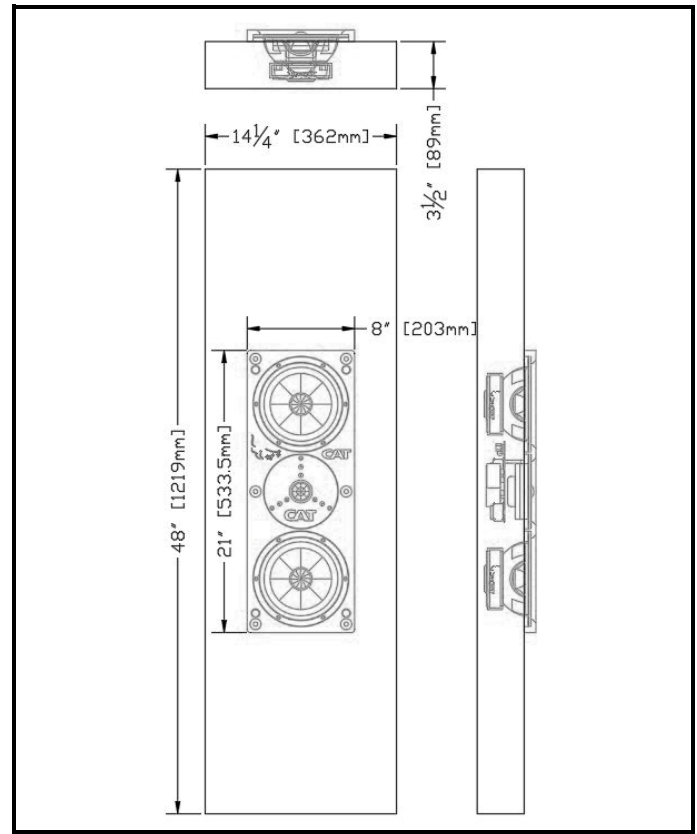

[Click here to see a few grille examples](#)

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT Elite 700 IW	Channels 1
Maximum SPL @ 1m 131dB	Frequency Response 29Hz-24kHz
Minimum Amplifier Power 300W @ 4Ω	Maximum Amplifier Power Unlimited* @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

[CAT MBX 1250.2 Amplifier](#)

[CAT 300.8 Amplifier](#)

[Previous Page](#)


[Return To Product List](#)

CAT Elite 700 - Other Configurations




Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.


In-Cabinet / Bookshelf

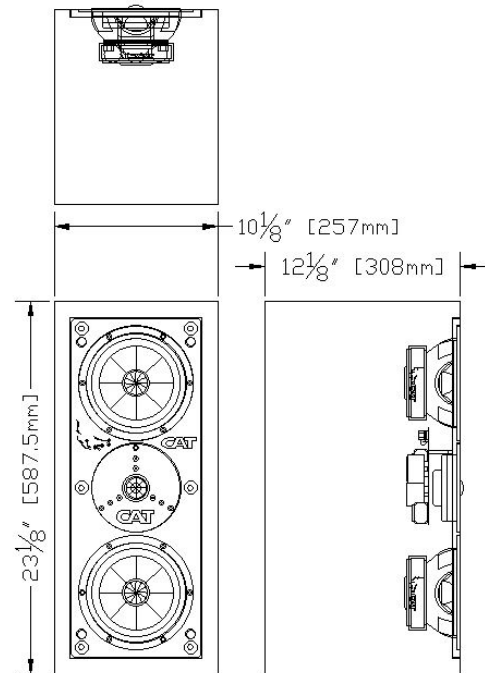

In-Ceiling

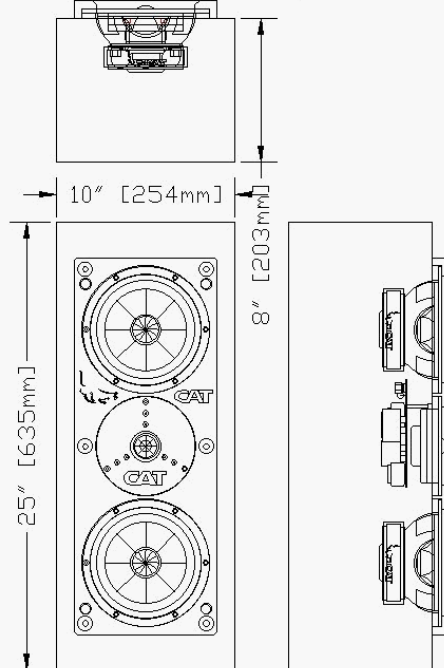

Angled (30° Example)

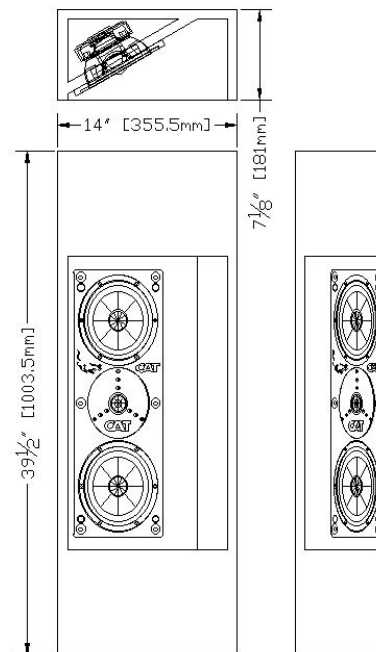

*Custom charge applies

[Previous Page](#)

[Return To Product List](#)

CAT Elite 800 IW




The CAT Elite 800 loudspeaker system integrates twin CAT Elite 8" and twin CAT Elite 5.5" copper phase plug curvilinear aluminum cone woofer drivers with a CAT Elite 30mm silk-dome tweeter. Constructed with an HDF enclosure and a 1/2" thick CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

[Click here to see a few grille examples](#)

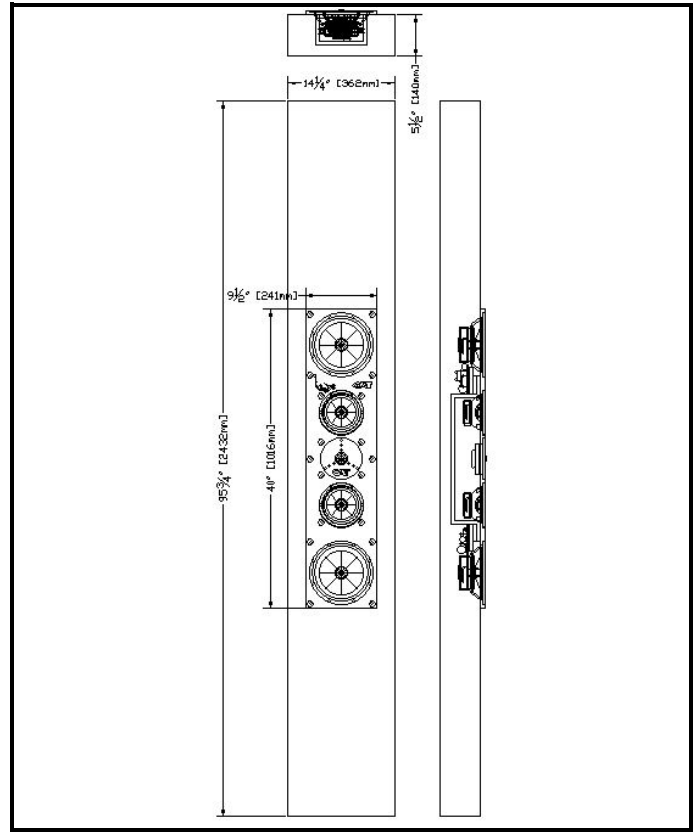

[Alternate Configurations / Dimensions](#)

Specifications

Model	Channels
CAT Elite 800 IW	2
Maximum SPL @ 1m	Frequency Response
131dB	29Hz-24kHz
Minimum Amplifier Power	Maximum Amplifier Power
500W @ 4Ω	Unlimited* @ 4Ω
Nominal Impedance	Sensitivity
4Ω	90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

[CAT MBX 1250.2 Amplifier](#)

[CAT 300.8 Amplifier](#)




[Previous Page](#)

[Return To Product List](#)

CAT Elite 800 - Other Configurations



Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.

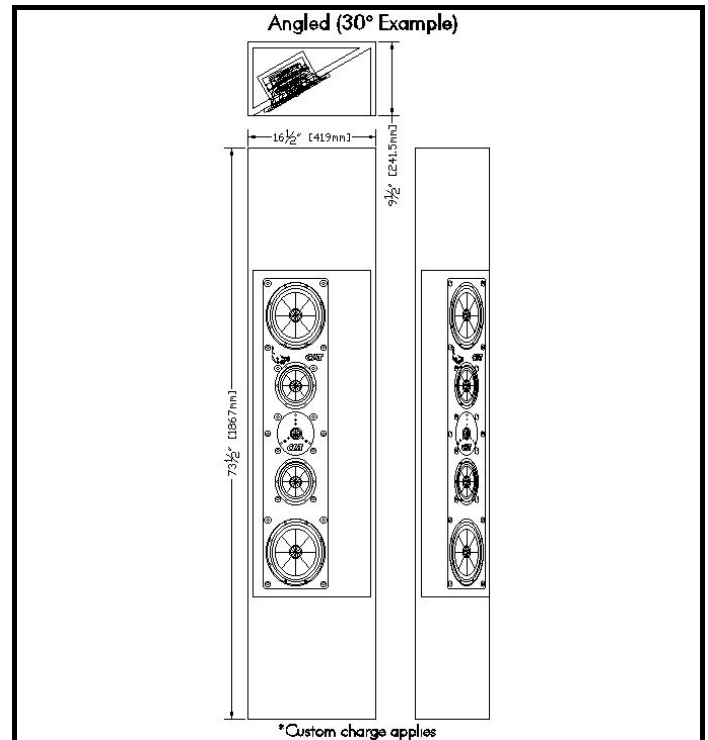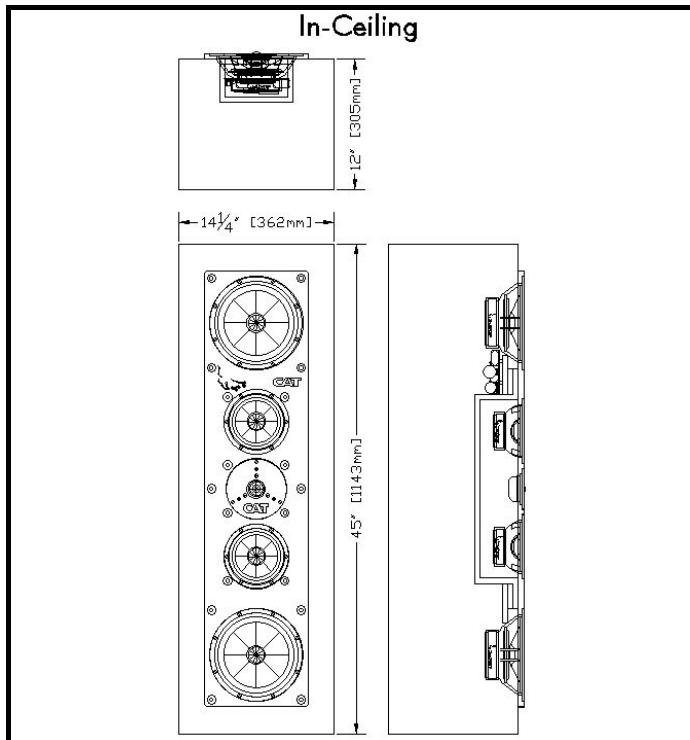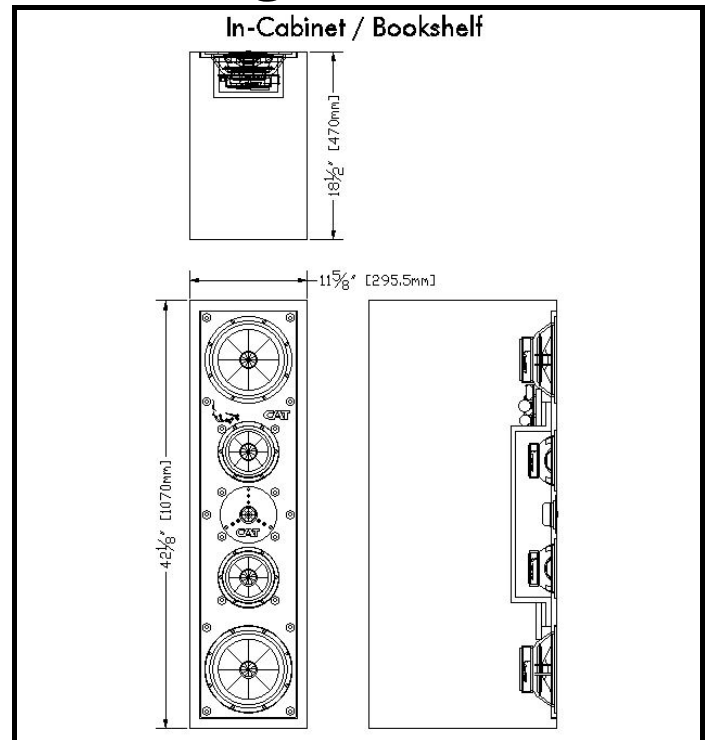

CAT Elite S5 IW




This 12" curvilinear aluminum cone subwoofer will accurately reproduce low frequencies down below 19Hz. Constructed with an HDF enclosure and a 1.5" CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

[Click here to see a few grille examples](#)

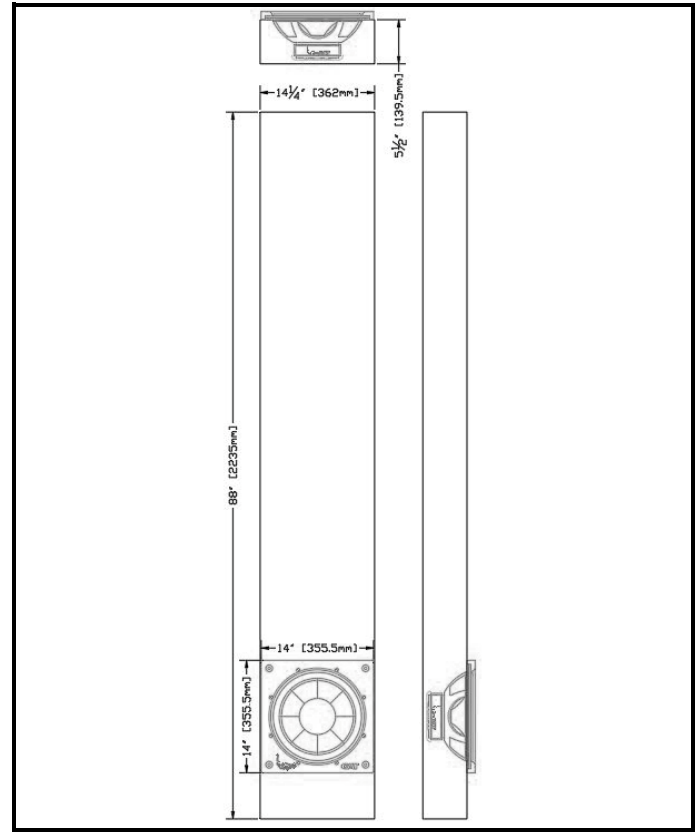

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT Elite S5 IW	Channels 1
Maximum SPL @ 1m 129dB	Frequency Response 20Hz-1kHz
Minimum Amplifier Power 300W @ 4Ω	Maximum Amplifier Power Unlimited* @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

[CAT MBX 1250.2 Amplifier](#)

[CAT 300.8 Amplifier](#)

[Previous Page](#)


[Return To Product List](#)

CAT Elite S5 - Other Configurations




Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.


In-Cabinet / Bookshelf

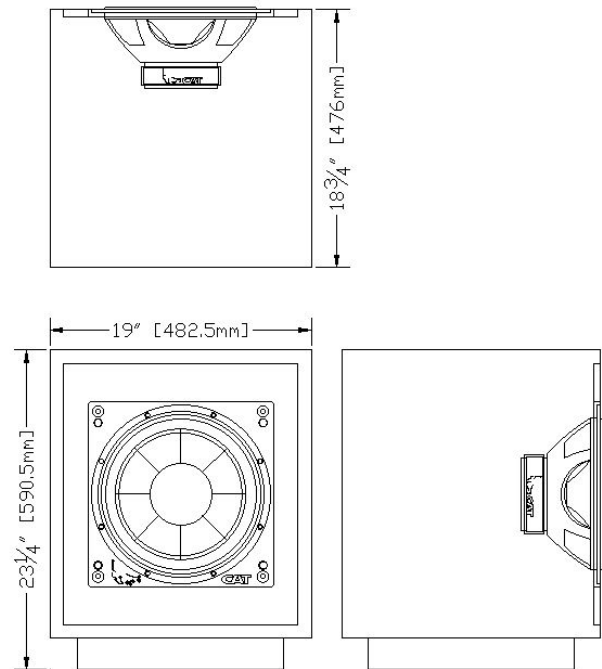

In-Ceiling

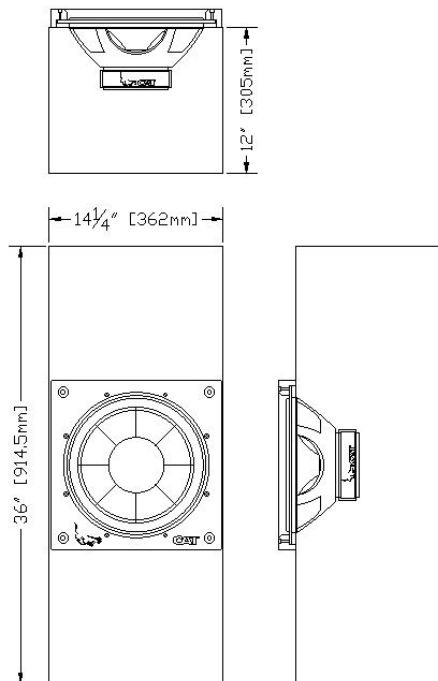

C-Shaped

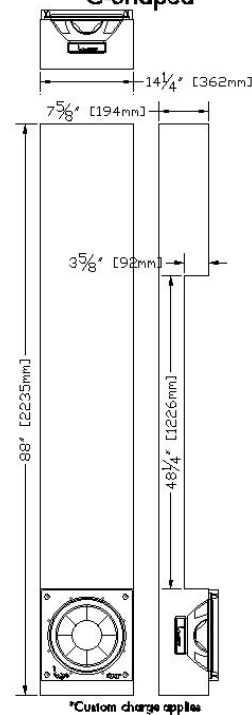

[Previous Page](#)

[Return To Product List](#)

CAT MBX 900 IW




The CAT MBX 900 loudspeaker system physically aligns signal paths and integrates twin CAT MBX 6.5" copper phase plug curvilinear aluminum cone woofer drivers with the CAT MBX 30mm silk-dome tweeter. Constructed with an HDF enclosure and a 1/2" thick CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

[Click here to see a few grille examples](#)

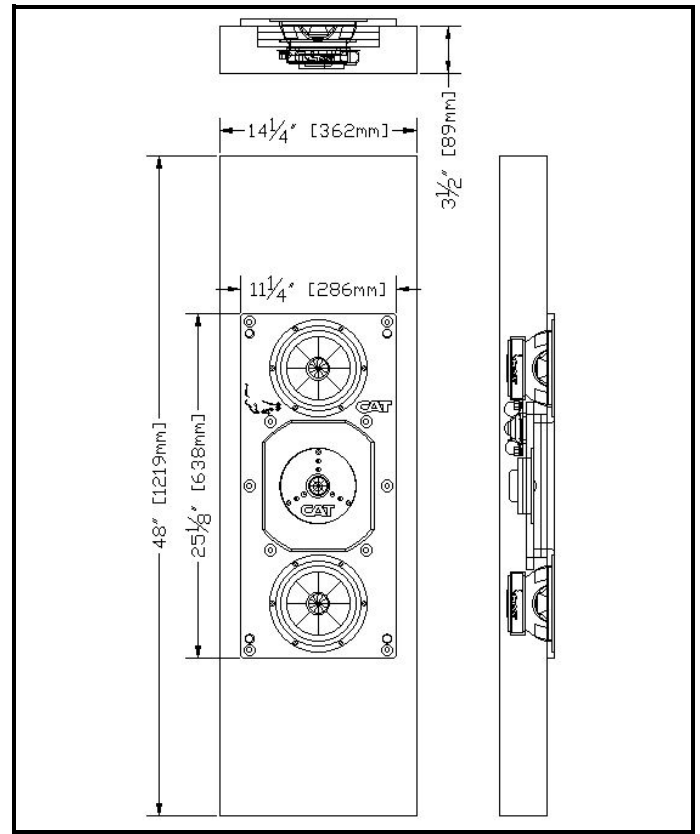

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT MBX 900 IW	Channels 1
Maximum SPL @ 1m 131dB	Frequency Response 29Hz-24kHz
Minimum Amplifier Power 300W @ 4Ω	Maximum Amplifier Power Unlimited* @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

[CAT MBX 1250.2 Amplifier](#)

[CAT 300.8 Amplifier](#)




[Previous Page](#)

[Return To Product List](#)

CAT MBX 900 - Other Configurations



Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.

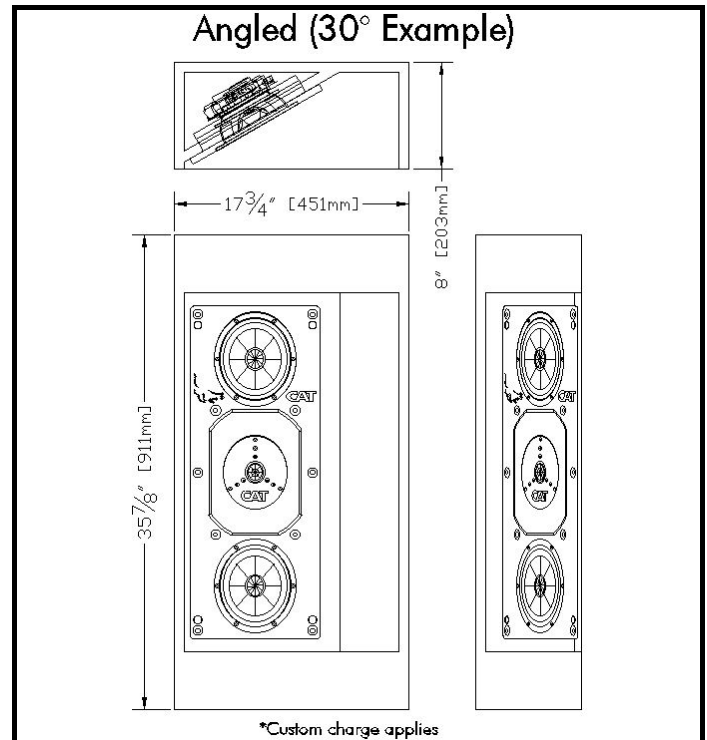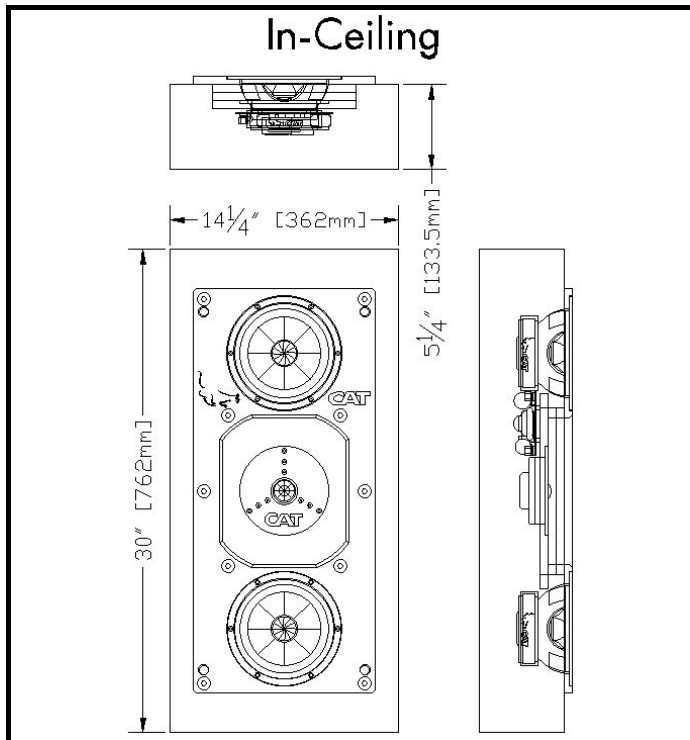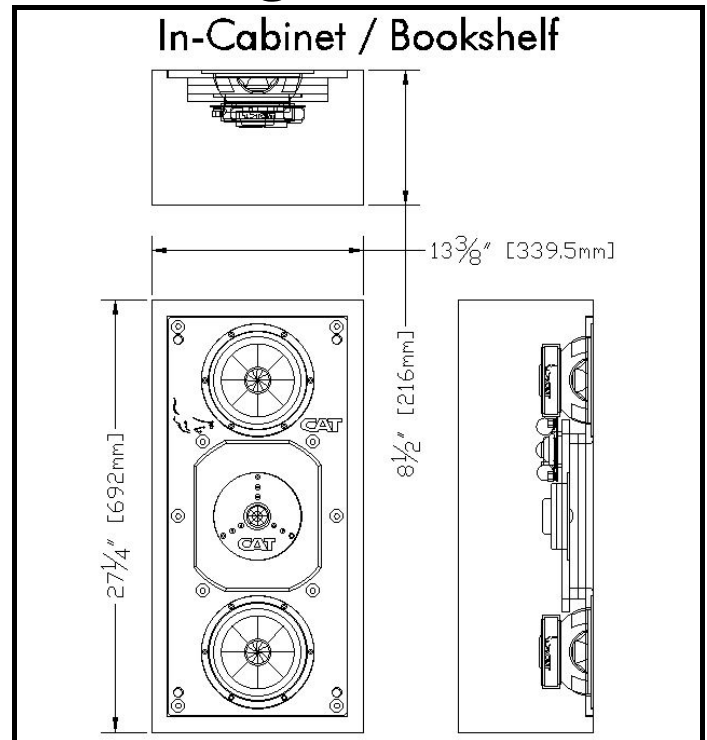

[Previous Page](#)

[Return To Product List](#)

CAT MBX 1000 IW




The CAT MBX 1000 loudspeaker system physically aligns signal paths and integrates twin CAT MBX 8" and twin CAT MBX 5.5" copper phase plug curvilinear aluminum cone woofer drivers with the industry's highest-performing tweeter, the CAT MBX 30mm silk-dome tweeter. Constructed with an HDF enclosure and a 1/2" thick CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

[Click here to see a few grille examples](#)

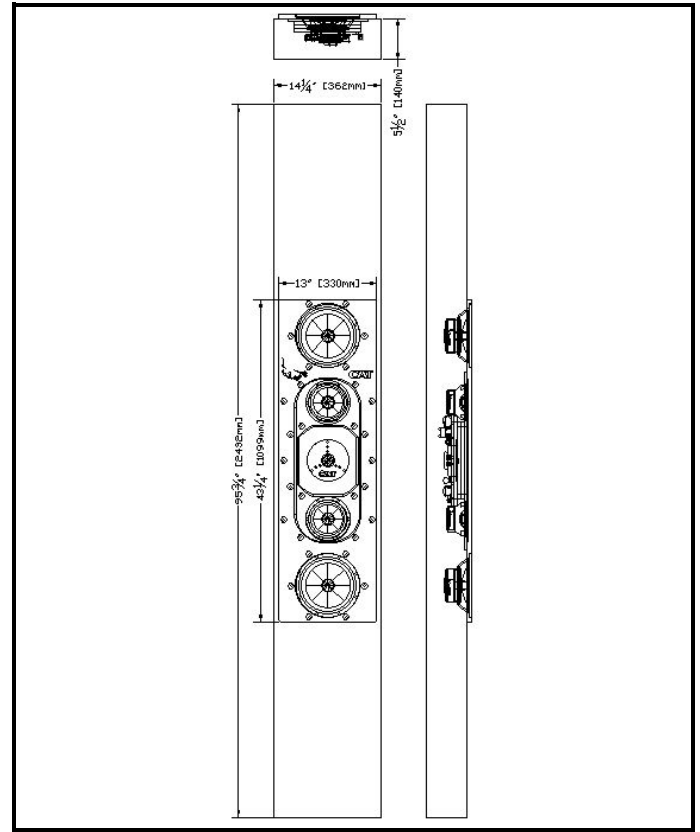

[Alternate Configurations / Dimensions](#)

Specifications

Model	Channels
CAT MBX 1000 IW	2
Maximum SPL @ 1m	Frequency Response
131dB	29Hz-24kHz
Minimum Amplifier Power	Maximum Amplifier Power
500W @ 4Ω	Unlimited* @ 4Ω
Nominal Impedance	Sensitivity
4Ω	90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

CAT MBX 1250.2 Amplifier




[Previous Page](#)

[Return To Product List](#)

CAT MBX 1000 - Other Configurations



Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.

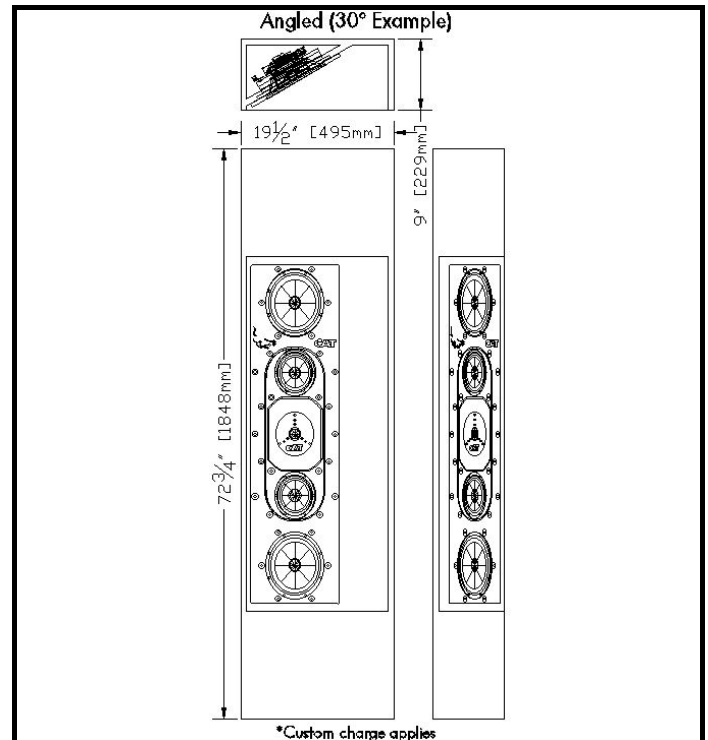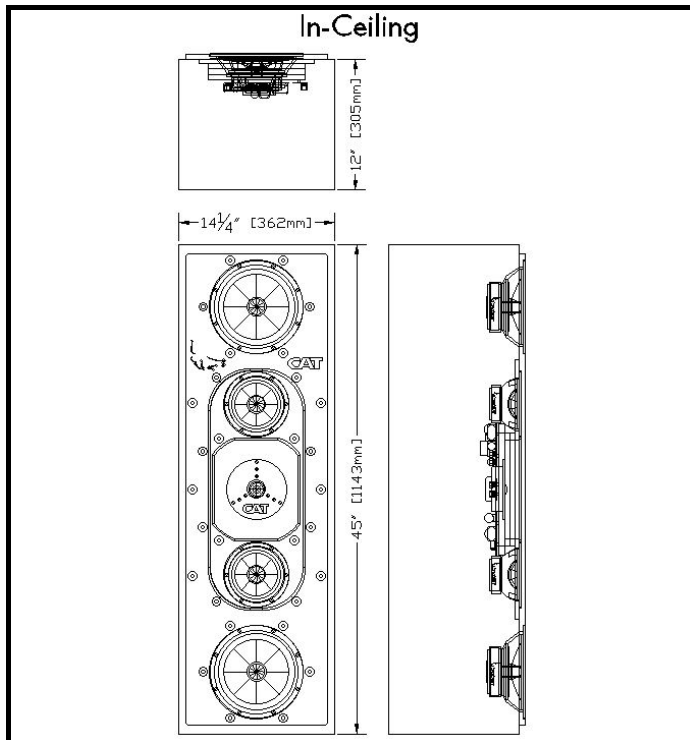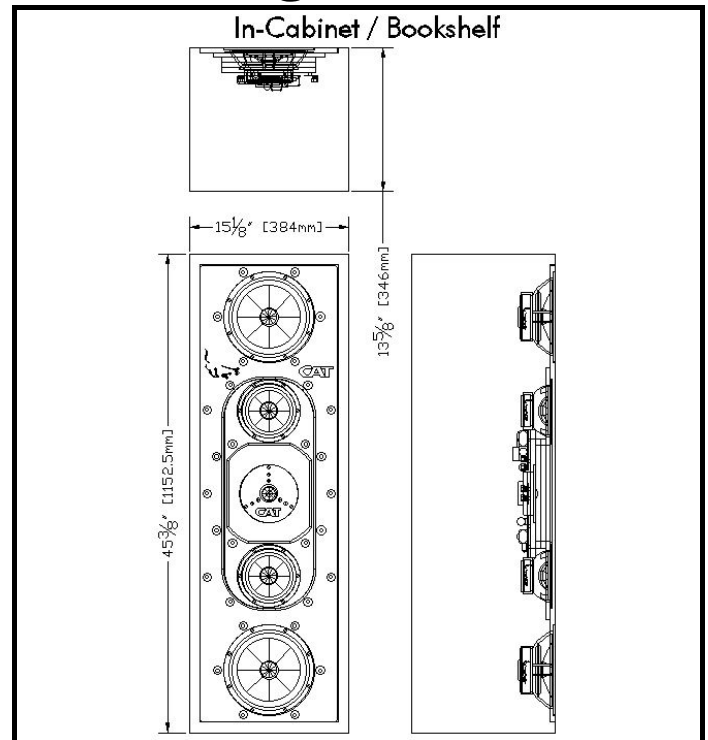

[Previous Page](#)

[Return To Product List](#)

CAT MBX S7 IW




This 10" curvilinear aluminum cone subwoofer will accurately reproduce low frequencies down below 22Hz. Constructed with an HDF enclosure and a 1.5" CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

[Click here to see a few grille examples](#)

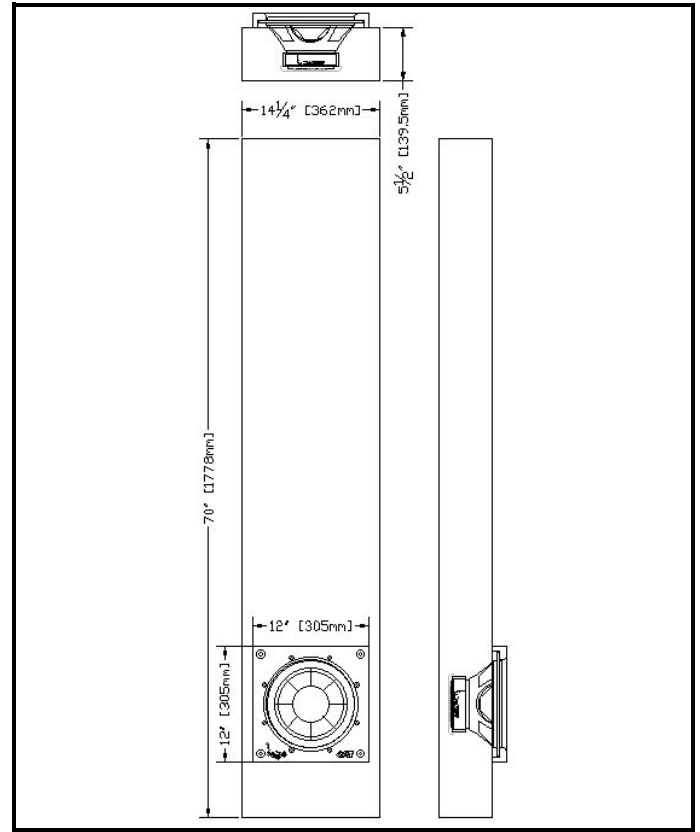

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT MBX S7 IW	Channels 1
Maximum SPL @ 1m 129dB	Frequency Response 22Hz-1kHz
Minimum Amplifier Power 300W @ 4Ω	Maximum Amplifier Power Unlimited* @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

[CAT MBX 1250.2 Amplifier](#)

[CAT 300.8 Amplifier](#)




[Previous Page](#)

[Return To Product List](#)

CAT MBX S7 - Other Configurations



Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.

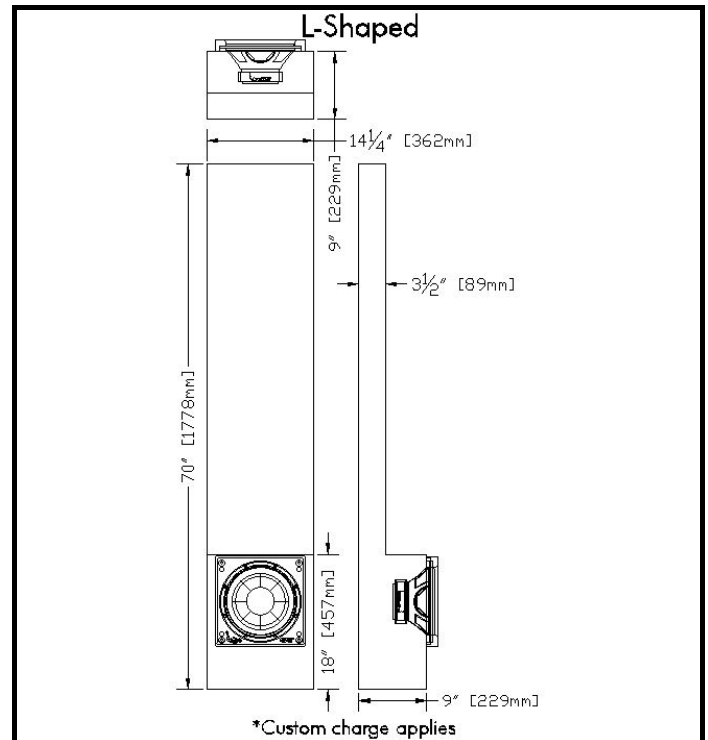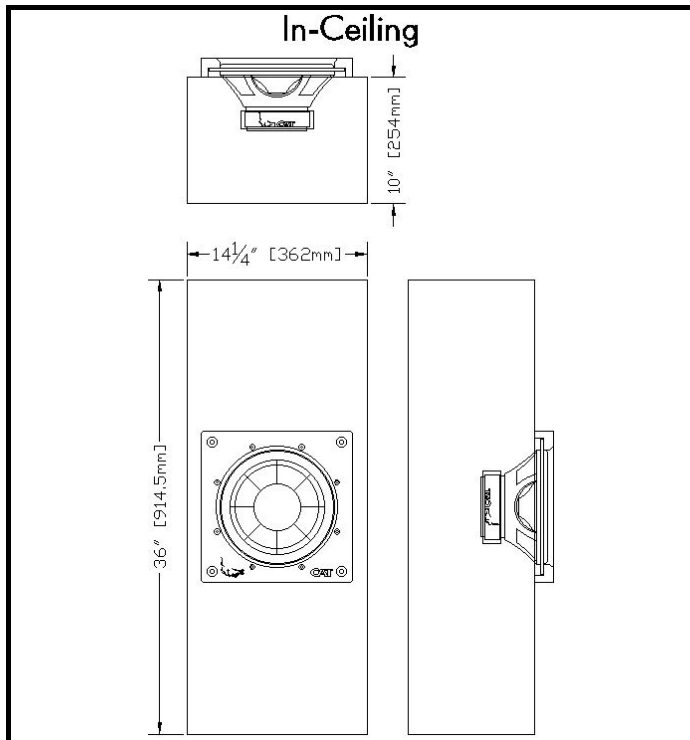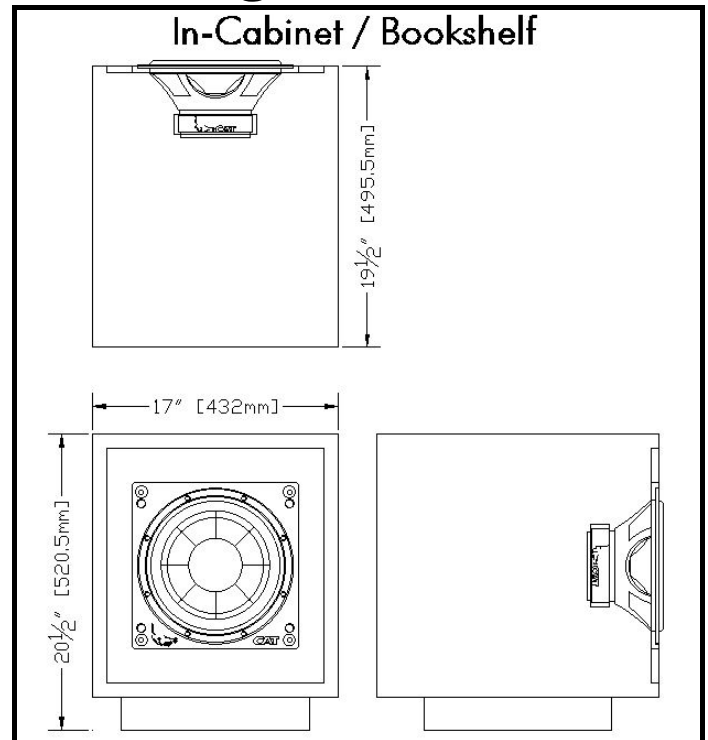

[Previous Page](#)

[Return To Product List](#)

CAT MBX S8 IW




This 12" curvilinear aluminum cone subwoofer will accurately reproduce low frequencies down below 19Hz. Constructed with an HDF enclosure and a 1.5" CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

[Click here to see a few grille examples](#)

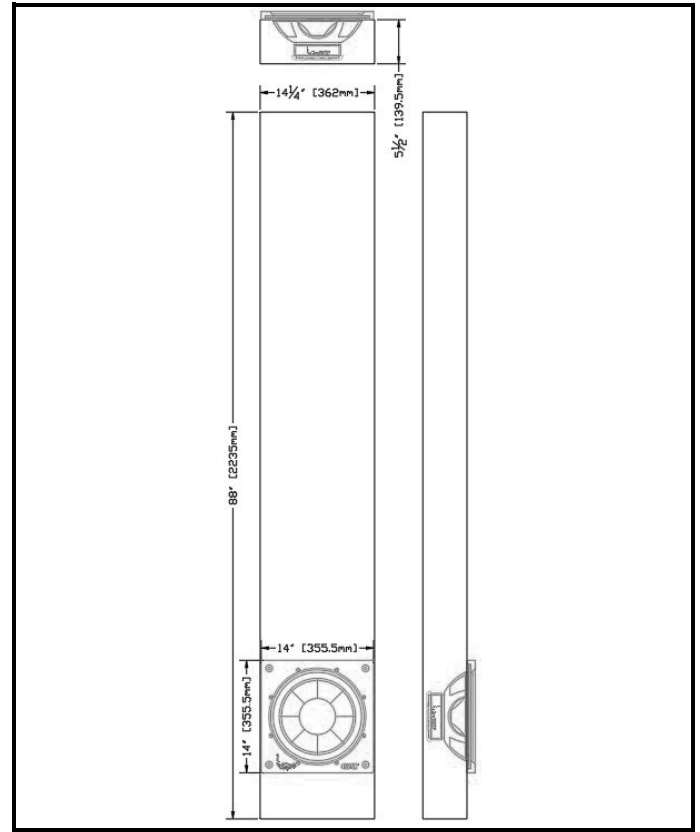

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT MBX S8 IW	Channels 1
Maximum SPL @ 1m 129dB	Frequency Response 20Hz-1kHz
Minimum Amplifier Power 300W @ 4Ω	Maximum Amplifier Power Unlimited* @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

[CAT MBX 1250.2 Amplifier](#)

[CAT 300.8 Amplifier](#)

[Previous Page](#)


[Return To Product List](#)

CAT MBX S8 - Other Configurations




Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.


In-Cabinet / Bookshelf

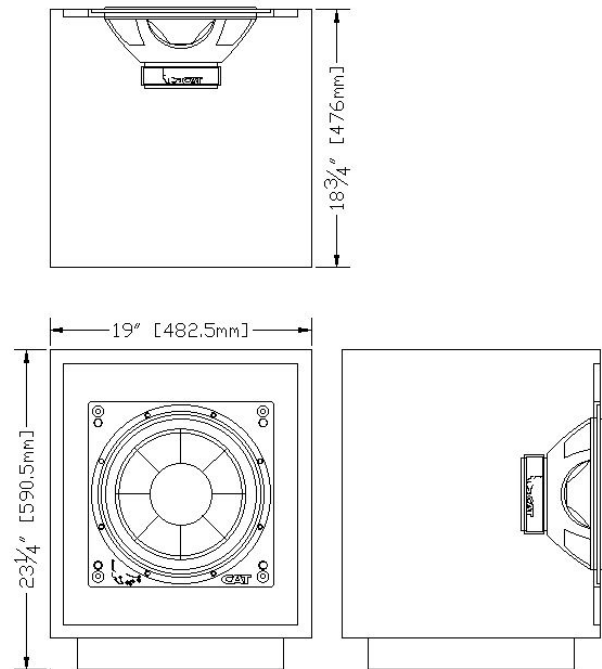

In-Ceiling

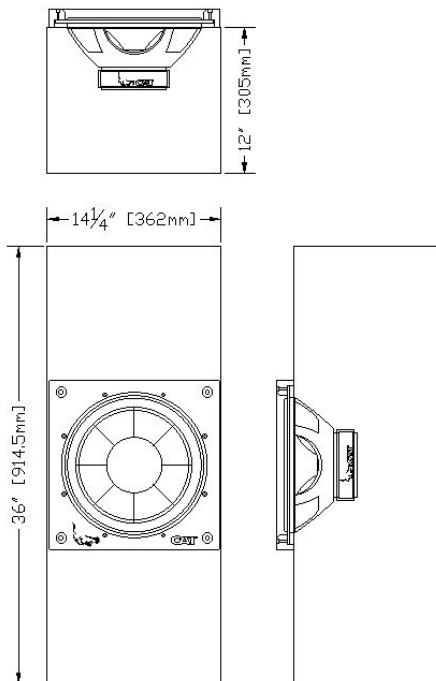

C-Shaped

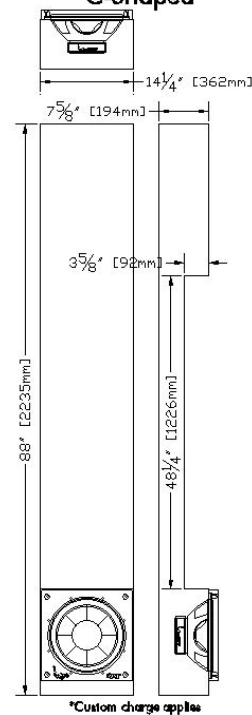

*Custom charge applies

[Previous Page](#)

[Return To Product List](#)


CAT MBX S10 IW



This 18" machined aluminum cone, dual voice coil subwoofer will accurately reproduce low frequencies down to 15Hz. A massive ceramic magnet provides huge power-handling capabilities. Constructed with an HDF enclosure and a 2" CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

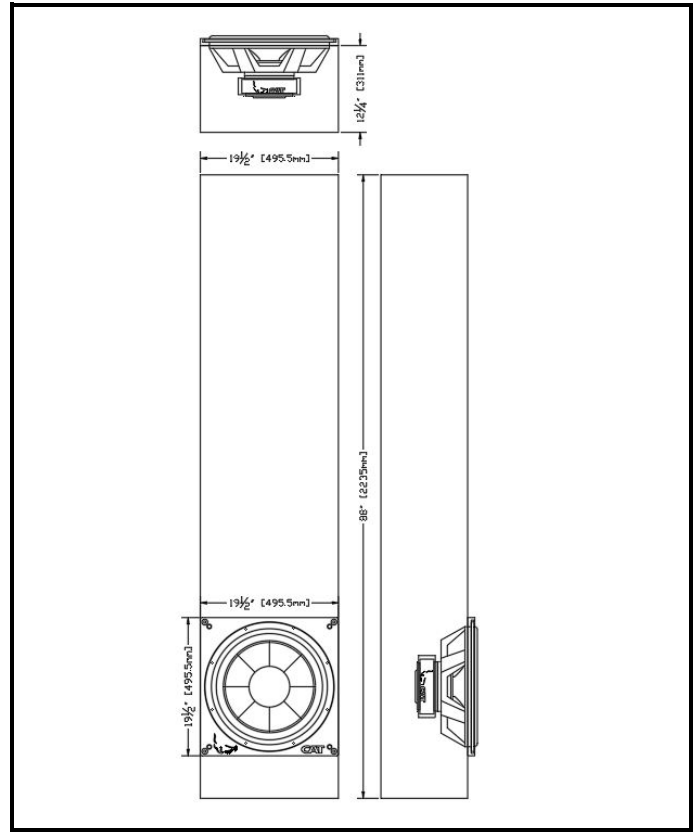

[Click here to see a few grille examples](#)

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT MBX S10 IW	Channels 2
Maximum SPL @ 1m 136dB	Frequency Response 15Hz-1kHz
Minimum Amplifier Power 500W @ 4Ω	Maximum Amplifier Power Unlimited* @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

CAT MBX 1250.2 Amplifier




[Previous Page](#)

[Return To Product List](#)

CAT MBX S10 - Other Configurations



Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.

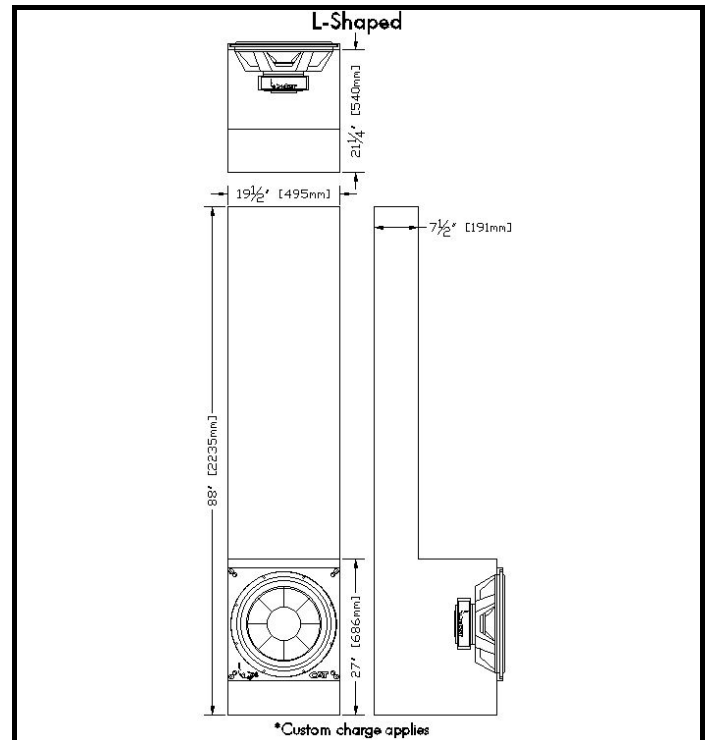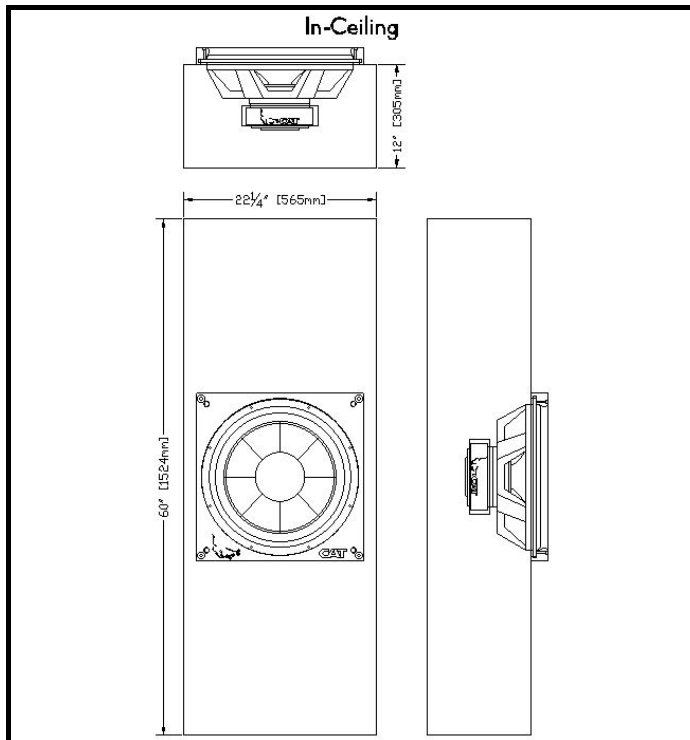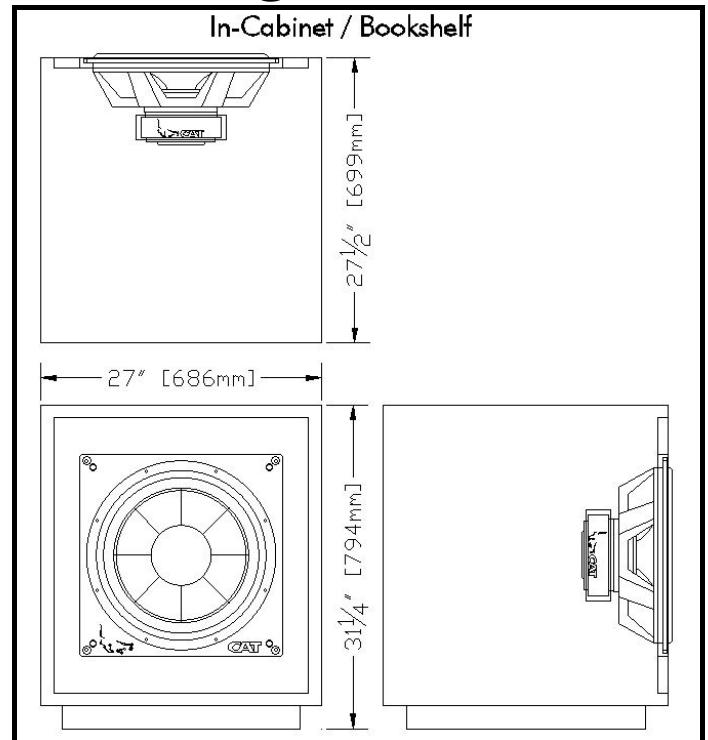

[Previous Page](#)

[Return To Product List](#)


CAT MBX S11 IW



This 22" machined aluminum cone subwoofer will accurately reproduce low frequencies down to 10Hz. A hand-constructed neodymium magnet provides massive power-handling capabilities. Constructed with an HDF enclosure and a 2" CAT MBX105 ultra high-density driver baffle (CAT proprietary fiber-reinforced composite).

Grilles

Most commonly, these loudspeakers are installed behind acoustic fabric and do not require grilles. However, many grille options exist.

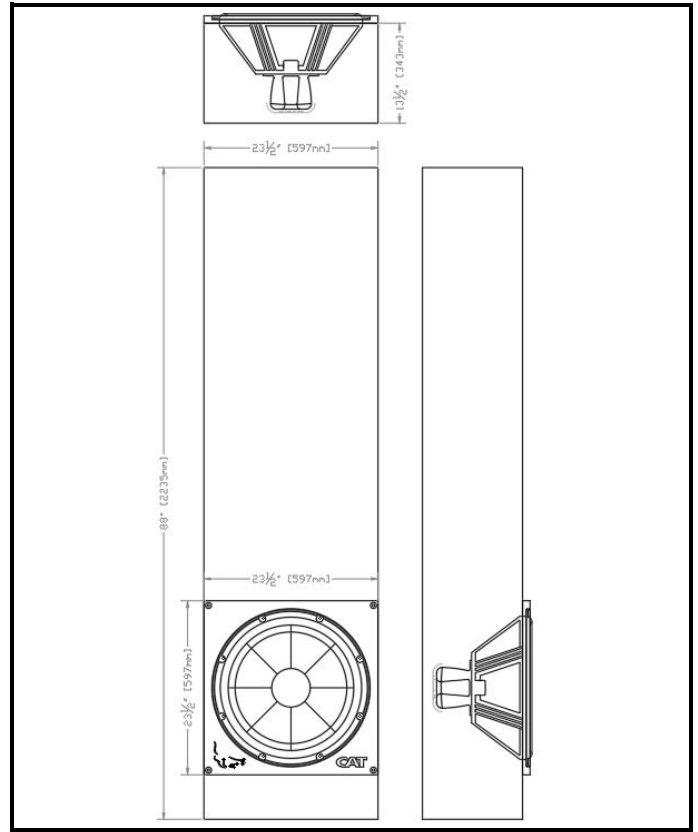

[Click here to see a few grille examples](#)

[Alternate Configurations / Dimensions](#)

Specifications

Model CAT MBX S11 IW	Channels 1
Maximum SPL @ 1m 138dB	Frequency Response 10Hz-1kHz
Minimum Amplifier Power 500W @ 4Ω	Maximum Amplifier Power Unlimited* @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

CAT MBX 1250.2 Amplifier




[Previous Page](#)

[Return To Product List](#)

CAT MBX S11 - Other Configurations



Apart from the standard In-Wall configuration, this loudspeaker enclosure is also available in these other configurations; pricing may vary from standard In-Wall configuration. In addition to the options shown here, CAT can customize this loudspeaker to fit within virtually any other constraints your project may have, including custom L/W/H, C-shaped, L-shaped, notched, angled, soundbars, or combo boxes (combined with subwoofers). Just ask the CAT sales team for details of all your various options and pricing.

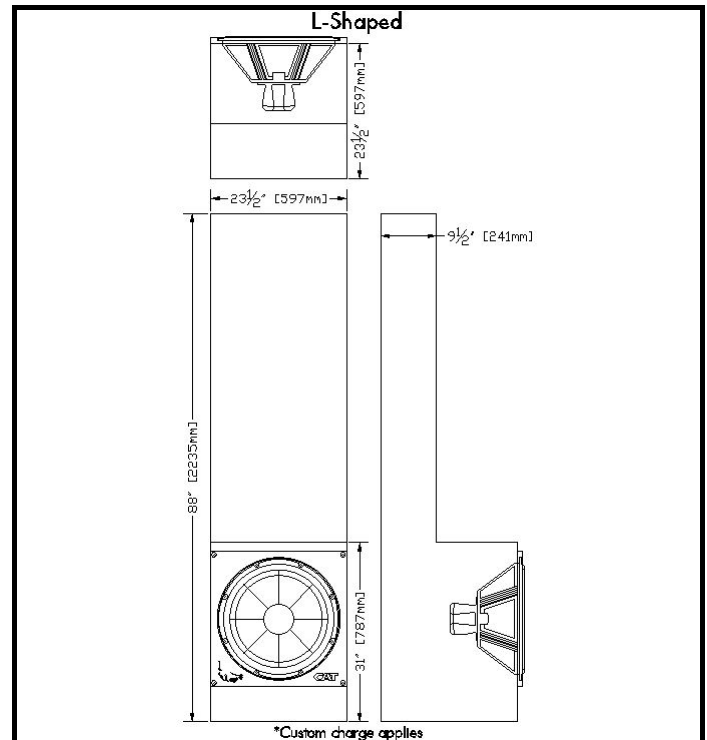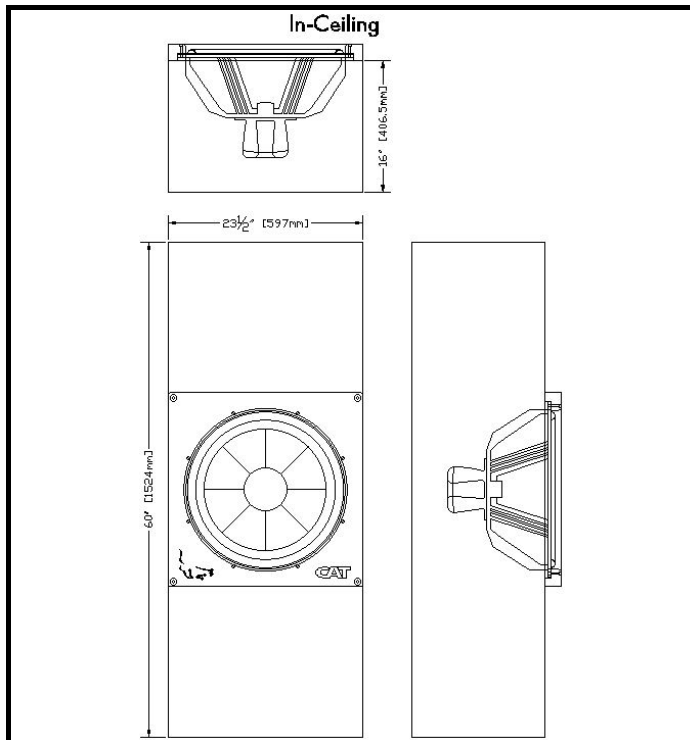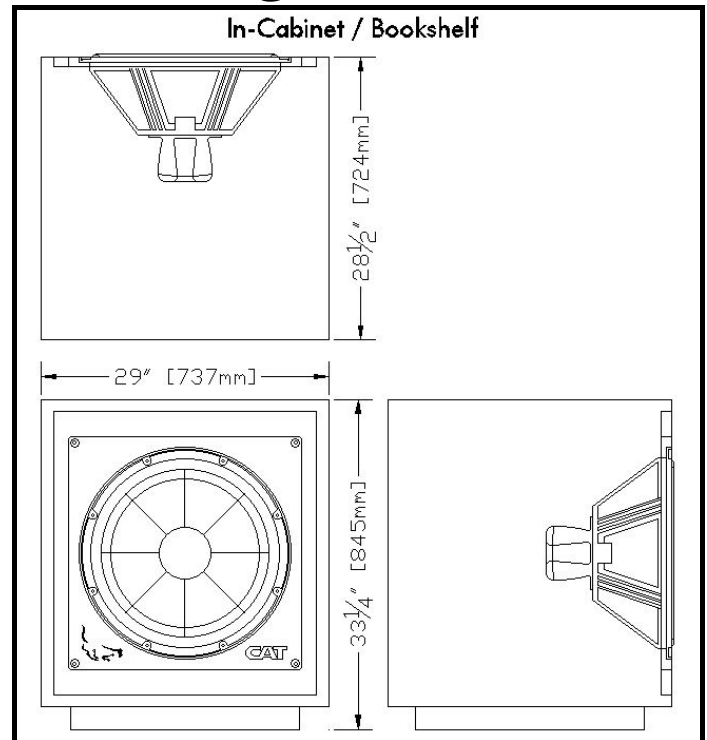


[Previous Page](#)

[Return To Product List](#)

CAT MBX Trinity



The CAT MBX Trinity speaker system physically aligns signal paths and integrates twin 6.5" copper phase plug curvilinear aluminum cone woofers and the industry's highest-performing silk dome tweeter. Enclosure and solid face constructed entirely of our proprietary MBX105 ultra-high density resin composite material.

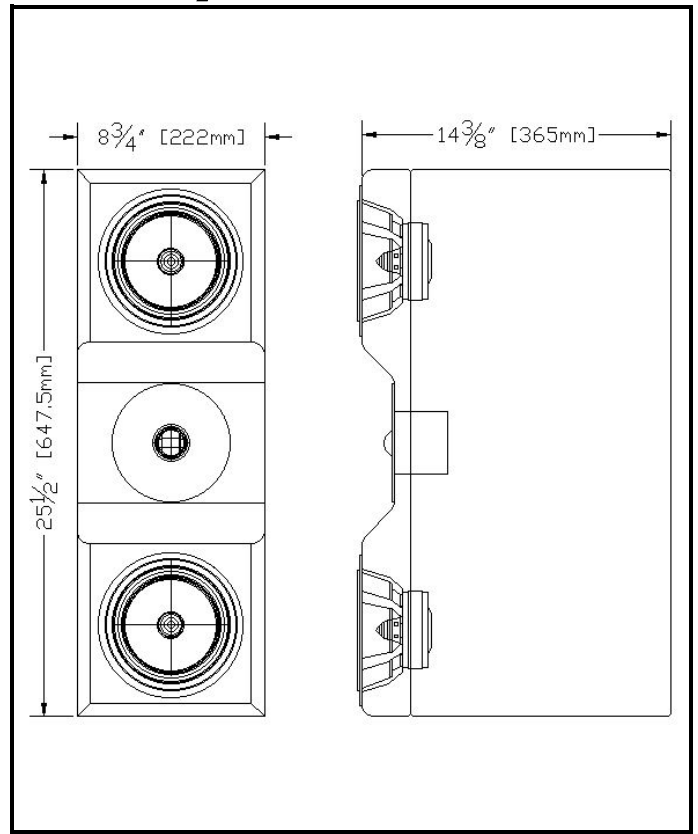

Specifications

Model CAT MBX Trinity	Channels 1
Maximum SPL @ 1m 131dB	Frequency Response 24Hz-24kHz
Minimum Amplifier Power 300W @ 4Ω	Maximum Amplifier Power Unlimited* @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

CAT MBX 1250.2 Amplifier


[Previous Page](#)

[Return To Product List](#)

CAT MBX Yosemite



The CAT MBX Yosemite speaker system physically aligns signal paths and integrates twin 8" and twin 5.5" copper phase plug curvilinear aluminum cone woofers and the industry's highest-performing silk dome tweeter. Paired with a 12" CAT MBX subwoofer also with curvilinear aluminum cones. Enclosures and solid faces constructed entirely of our proprietary MBX105 ultra-high density resin composite material. This speaker accurately reproduces all frequencies within the range of human hearing.

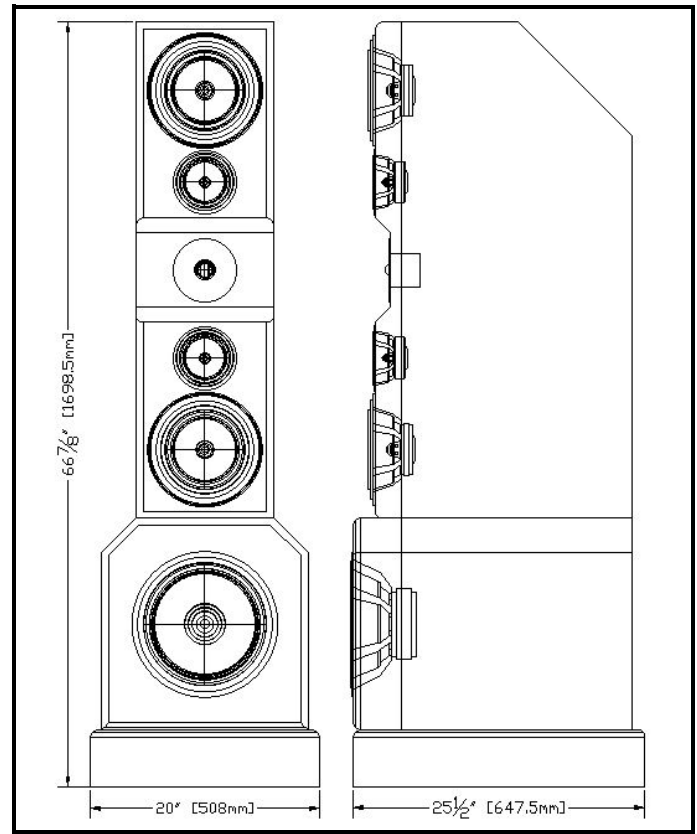

Specifications

Model CAT MBX Yosemite	Channels 3
Maximum SPL @ 1m 131dB	Frequency Response 20Hz-24kHz
Minimum Amplifier Power 500W @ 4Ω	Maximum Amplifier Power Unlimited* @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

CAT MBX 1250.2 Amplifier


[Previous Page](#)

[Return To Product List](#)

CAT MBX Sequoia



The CAT MBX Sequoia speaker system physically aligns signal paths and integrates twin 8" and twin 5.5" copper phase plug curvilinear aluminum cone woofers and the industry's highest-performing silk dome tweeter. Flanked by twin 12" CAT MBX subwoofers also with curvilinear aluminum cones. Enclosures and solid faces constructed entirely of our proprietary MBX105 ultra-high density resin composite material. This speaker accurately reproduces all frequencies within the range of human hearing.

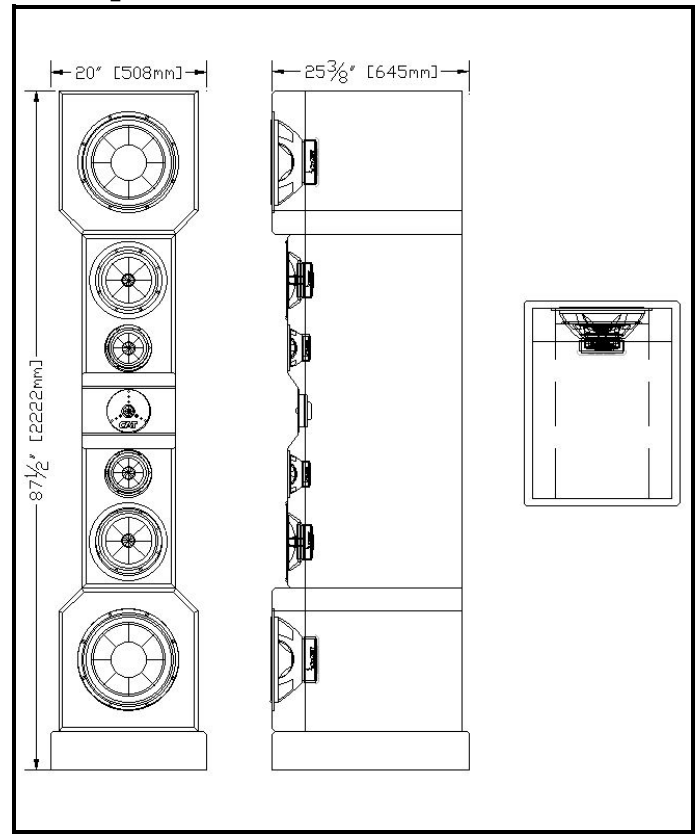

Specifications

Model CAT MBX Sequoia	Channels 4
Maximum SPL @ 1m 131dB	Frequency Response 20Hz-24kHz
Minimum Amplifier Power 500W @ 4Ω	Maximum Amplifier Power Unlimited* @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

CAT MBX 1250.2 Amplifier

[Previous Page](#)


[Return To Product List](#)

CAT MBX FX



The CAT MBX FX speaker system physically aligns signal paths and integrates twin 8" and twin 5.5" copper phase plug curvilinear aluminum cone woofers and the industry's highest-performing silk dome tweeter. Flanked by a 22" CAT MBX Machined-aluminum cone neodymium-magnet subwoofer and a 12" CAT MBX subwoofer with curvilinear aluminum cone.

Enclosures and solid faces constructed entirely of our proprietary MBX105 ultra-high density resin composite material. This speaker accurately reproduces all frequencies within the range of human hearing.

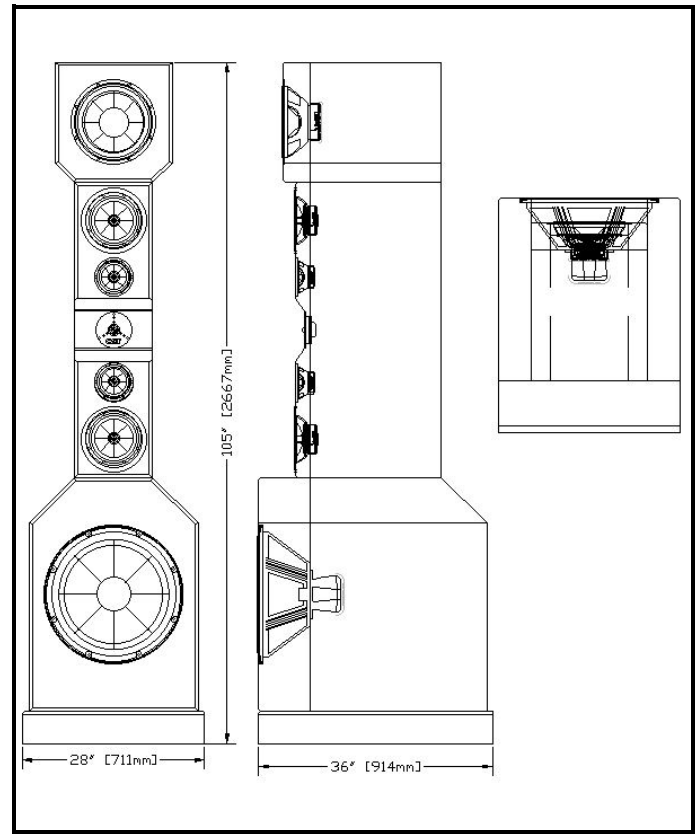

Specifications

Model
CAT MBX FX

Channels
4

Maximum SPL @ 1m
135dB

Frequency Response
10Hz-24kHz

Minimum Amplifier Power
500W @ 4Ω

Maximum Amplifier Power
Unlimited* @ 4Ω

Nominal Impedance
4Ω

Sensitivity
90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

CAT MBX 1250.2 Amplifier


[Previous Page](#)

[Return To Product List](#)

CAT MBX FXX



The CAT MBX FXX speaker system physically aligns signal paths and integrates twin 8" and twin 5.5" copper phase plug curvilinear aluminum cone woofers and the industry's highest-performing silk dome tweeter. Flanked by twin 12" CAT MBX subwoofers also with curvilinear aluminum cones, plus twin 22" CAT MBX machined-aluminum neodymium subwoofers firing out from around it. Enclosures and solid faces constructed entirely of our proprietary MBX105 ultra-high density resin composite material. This speaker accurately reproduces all frequencies within the range of human hearing.

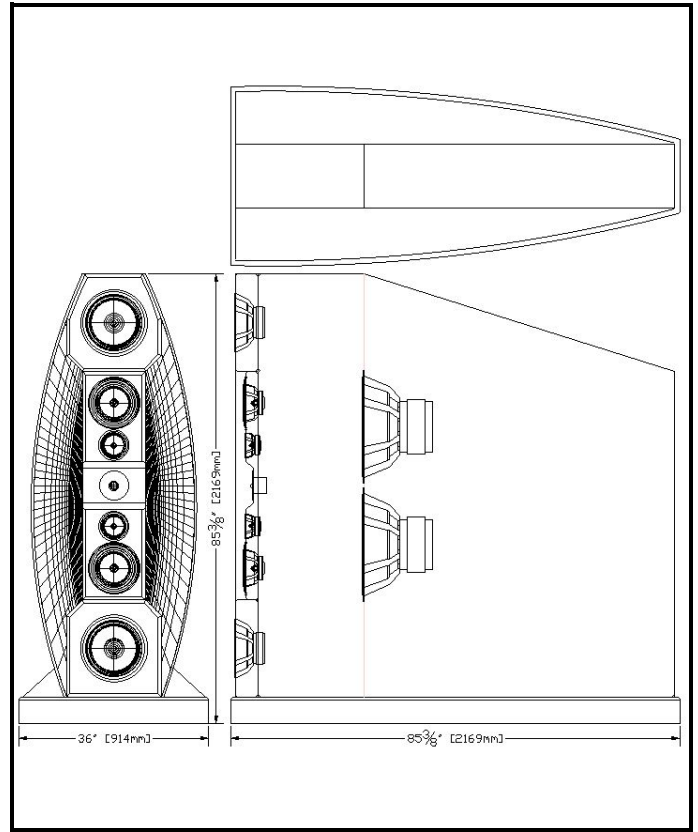

Specifications

Model
CAT MBX FXX

Channels
6

Maximum SPL @ 1m
138dB

Frequency Response
10Hz-24kHz

Minimum Amplifier Power
500W @ 4Ω

Maximum Amplifier Power
Unlimited* @ 4Ω

Nominal Impedance
4Ω

Sensitivity
90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

CAT MBX 1250.2 Amplifier


[Previous Page](#)

[Return To Product List](#)

CAT MBX Miramar



This 12" curvilinear aluminum cone subwoofer will accurately reproduce low frequencies down below 19Hz. Enclosures and solid faces constructed entirely of our proprietary MBX105 ultra-high density resin composite material.

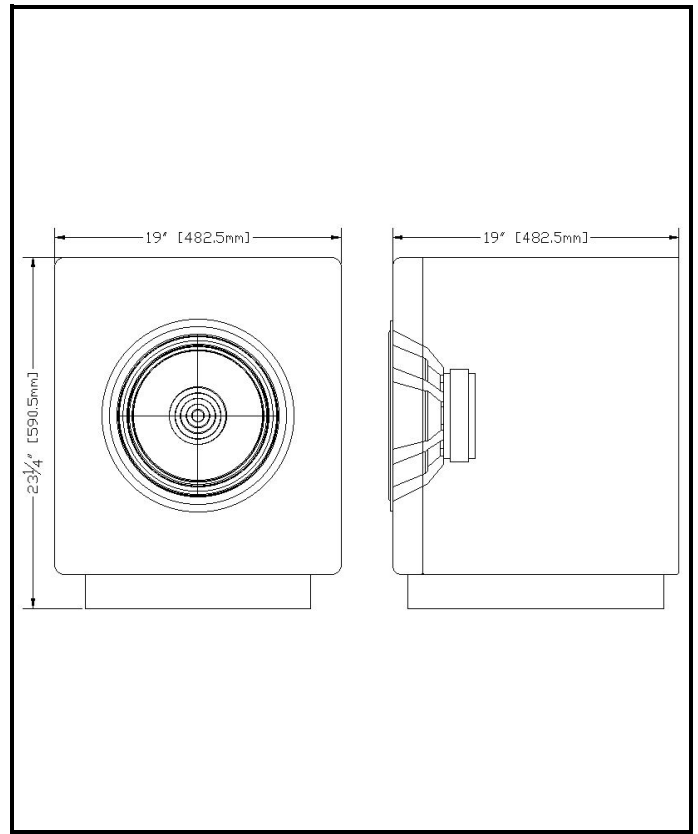

Specifications

Model CAT MBX Miramar	Channels 1
Maximum SPL @ 1m 129dB	Frequency Response 20Hz-1kHz
Minimum Amplifier Power 300W @ 4Ω	Maximum Amplifier Power Unlimited* @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

CAT MBX 1250.2 Amplifier

CAT 300.8 Amplifier


[Previous Page](#)

[Return To Product List](#)

CAT MBX Diablo



This 22" machined aluminum cone subwoofer will accurately reproduce low frequencies down to 10Hz. A hand-constructed neodymium magnet provides massive power-handling capabilities. Enclosures and solid faces constructed entirely of our proprietary MBX105 ultra-high density resin composite material.

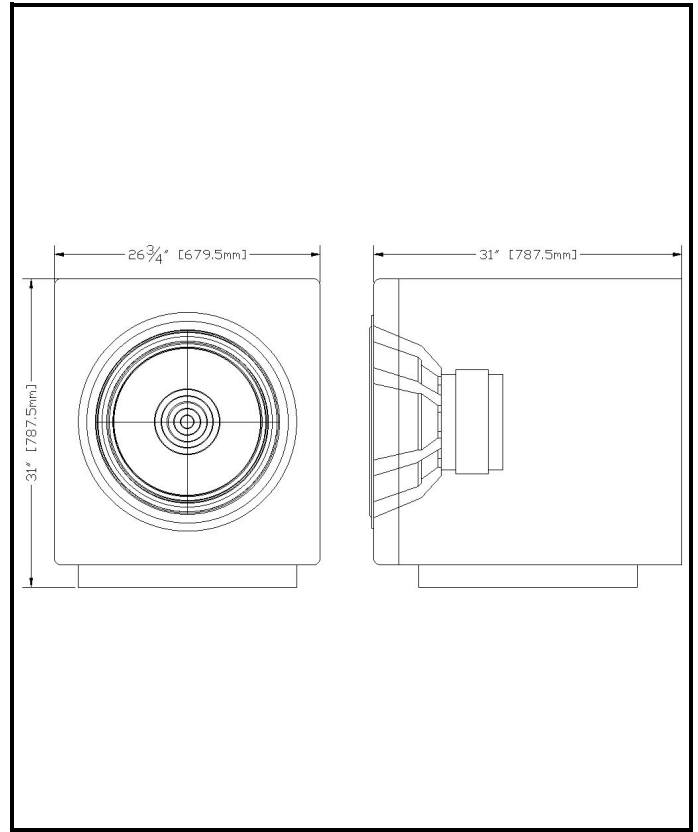

Specifications

Model CAT MBX Diablo	Channels 1
Maximum SPL @ 1m 138dB	Frequency Response 10Hz-1kHz
Minimum Amplifier Power 500W @ 4Ω	Maximum Amplifier Power Unlimited* @ 4Ω
Nominal Impedance 4Ω	Sensitivity 90dB

**Unlimited max. clean power, when calibrated by California Audio Technology w/ CAT MBX DSP*

Recommended Amplification

CAT MBX 1250.2 Amplifier


[Previous Page](#)

[Return To Product List](#)

CAT 200.6 Amplifier



The CAT 200.6 High Definition Power Amplifier delivers fast, accurate & clean power. Utilizing large, custom, audiophile quality, high-current toroidal transformers, filter capacitors and output transistors. This amp delivers over 200 pure watts x 6 channels into 4 ohm loads and can properly power demanding loudspeaker loads down to 2 ohms! Gold flashed circuit boards, and XLR isolation transformer protected inputs are some key performance features!

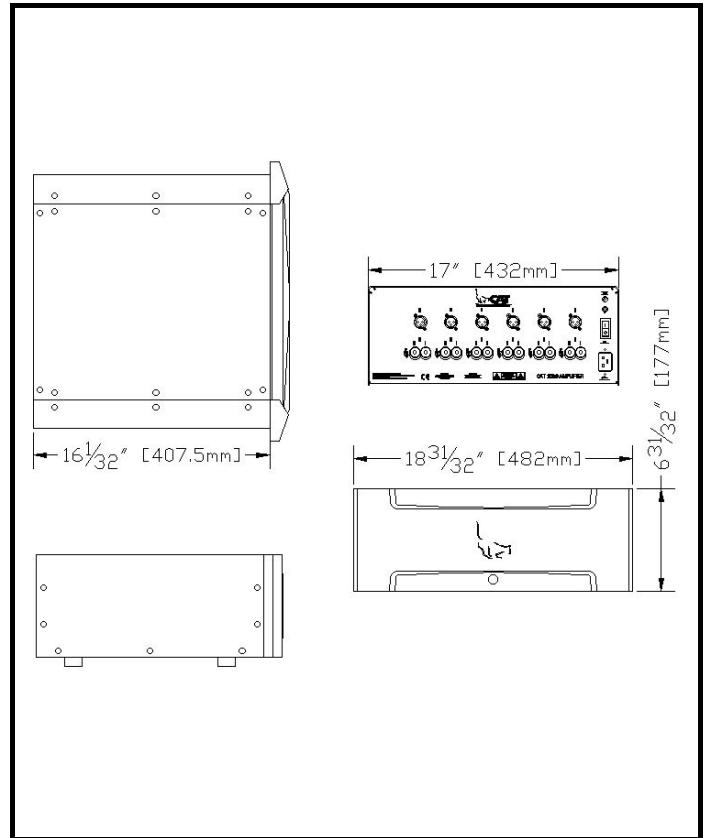

Specifications

Model
CAT 200.6

Signal to Noise Ratio "A Weighted"
> 120dB Below FTC Full Power

Heat Dissipation
2350 BTU/Hour

Crosstalk
> -100dB from 20Hz-20kHz

Amplifier Class
Class AB

Slew Rate
40 Volts/ μ s

Output Power (All Ch. Driven)
200W @ 4 Ω

Mains and Power Supply
C19 (20 Amp)

Power Supply Type
Toroidal

Power Outputs
6

Main Rating
115V 15A / 230V 8A

Inputs (Quantity and Type)
6 - XLR

Frequency Response
5Hz-55kHz +/- 3dB

Weight
43 kg

Distortion THD+N (20Hz-10kHz)
< 0.3% @ FTC Full Power

Dimensions (W x H x D)
483mm x 177mm x 419mm


[Previous Page](#)

[Return To Product List](#)

CAT 300.8 SE Amplifier



The CAT 300.8 SE High Definition Power Amplifier delivers fast, accurate & clean power. Utilizing extremely large, custom, audiophile quality, high-current toroidal transformers, filter capacitors and output transistors. This amp delivers over 300 pure watts x 8 channels into 4 ohm loads and can properly power demanding loudspeaker loads down to 2 ohms! Tunnel ram quiet-fan cooled, gold flashed circuit boards, XLR isolation transformer protected inputs & "Lightwave" optical comparator protection are some key performance features!

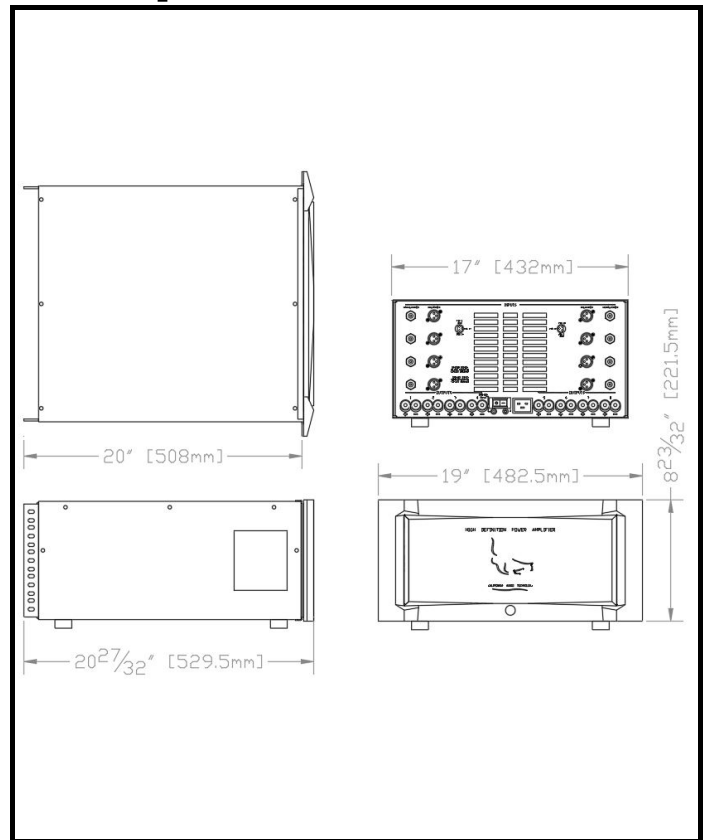

Specifications

Model
CAT 300.8 SE

Signal to Noise Ratio "A Weighted"
> 120dB Below FTC Full Power

Heat Dissipation
2350 BTU/Hour

Crosstalk
> -100dB from 20Hz-20kHz

Amplifier Class
Class AB

Slew Rate
40 Volts/ μ s

Output Power (All Ch. Driven)
300W @ 4 Ω

Mains and Power Supply
C19 (20 Amp)

Power Supply Type
Toroidal

Power Outputs
8

Main Rating
115V 15A / 230V 8A

Inputs (Quantity and Type)
8 - XLR

Frequency Response
5Hz-55kHz +/- 3dB

Weight
61 kg

Distortion THD+N (20Hz-10kHz)
< 0.3% @ FTC Full Power

Dimensions (W x H x D)
483mm x 222mm x 530mm


[Previous Page](#)

[Return To Product List](#)

CAT MBX 1250.2 FD XPR Amplifier



The CAT MBX 1250.2 FD XPR ultra high performance amplifier incorporates two 1250(+) watt mono-block "FD" fully differential output stage amplifiers in one chassis. This design doubles the slew rate, providing substantially increased speed, accuracy, musical realism, and far less listening fatigue at all volume levels. With 40 audiophile output transistors, over one Farad (1,000,000uF) of filter capacitance, and two proprietary toroidal transformers. Reliability (thanks to state of the art "Lightwave" protection), audiophile performance, "FD" speed and massive power (to drive the relentless demands of proprietary CAT MBX drivers - accuracy, speed, excursion, & extremely low impedance). All showcased in this industrially designed, CNC milled amplifier chassis that evokes the finest exotic automobiles!

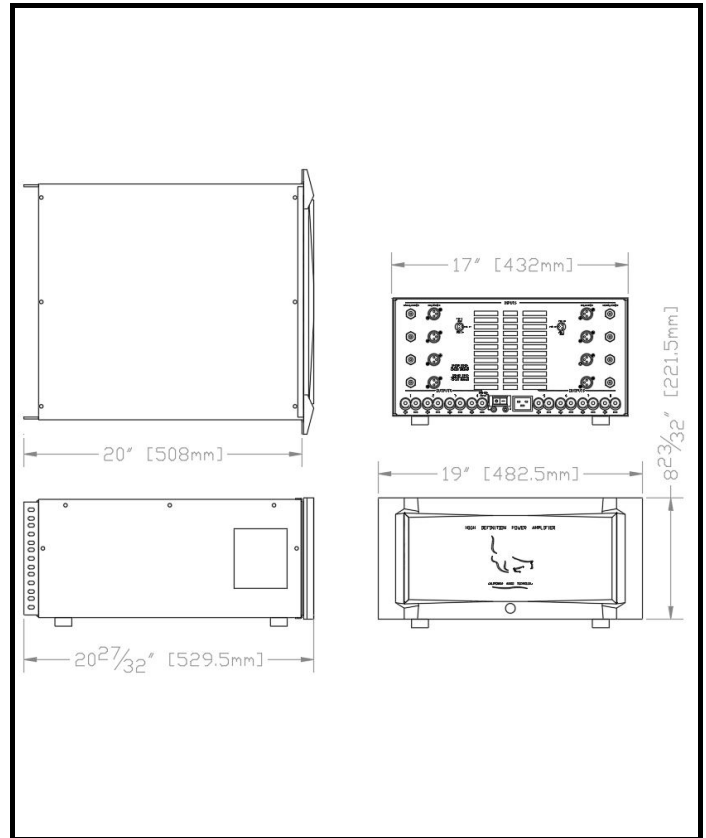

Specifications

Model CAT MBX 1250.2 FD XPR	Signal to Noise Ration "A Weighted" > 120dB Below FTC Full Power
Heat Dissipation 2550 BTU/Hour	Crosstalk > -100dB from 20Hz-20kHz
Amplifier Class Class AB	Slew Rate 40 Volts/ μ s
Output Power (All Ch. Driven) 1250W @ 4 Ω	Mains and Power Supply (2x) C19 (20 Amp)
Power Supply Type Toroidal	Power Outputs 2
Main Rating (2x) 115V 15A / 230V 8A	Inputs (Quantity and Type) 2 - XLR
Frequency Response 5Hz-55kHz +/- 3dB	Weight 65 kg
Distortion THD+N (20Hz-10kHz) < 0.3% @ FTC Full Power	Dimensions (W x H x D) 483mm x 267mm x 597mm

[Previous Page](#)

[Return To Product List](#)

Grille Options



Custom grilles are limited only by your imagination! CAT can manufacture custom grilles in CNC milled billet aluminum, CNC milled fiberglass epoxy resin, fabric wrapped, stamped steel, or any other material of your choice. Here are just a few examples of potential grille style choices offered.



[Previous Page](#)

[Return To Product List](#)

Custom Loudspeakers



Your imagination is the limit! CAT engineers can customize any of our products to suit your precise needs. Whether it's a simple height/width/length modification or an imaginative fully custom-built loudspeaker of highest grade materials and finishes of your choice, CAT can make any loudspeaker you dream of. Ask your CAT sales team member for an estimate to make your custom loudspeaker project a reality!






[Previous Page](#)

[Return To Product List](#)

Off-Site Engineering



CAT offers engineering services including room acoustical treatment plans, loudspeaker placements and customizations, DSP programming, rack layouts and wiring schematics, custom CNC milled parts, and any other engineering work your project may need. CAT engineers can coordinate with your designers, integrators, architects, ship builders, and client teams to fully customize the best audio systems for your project.

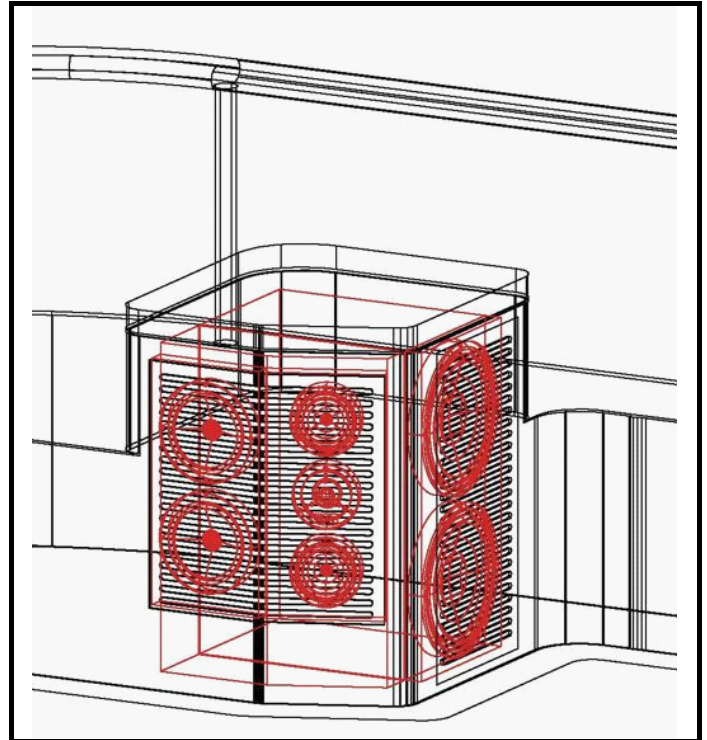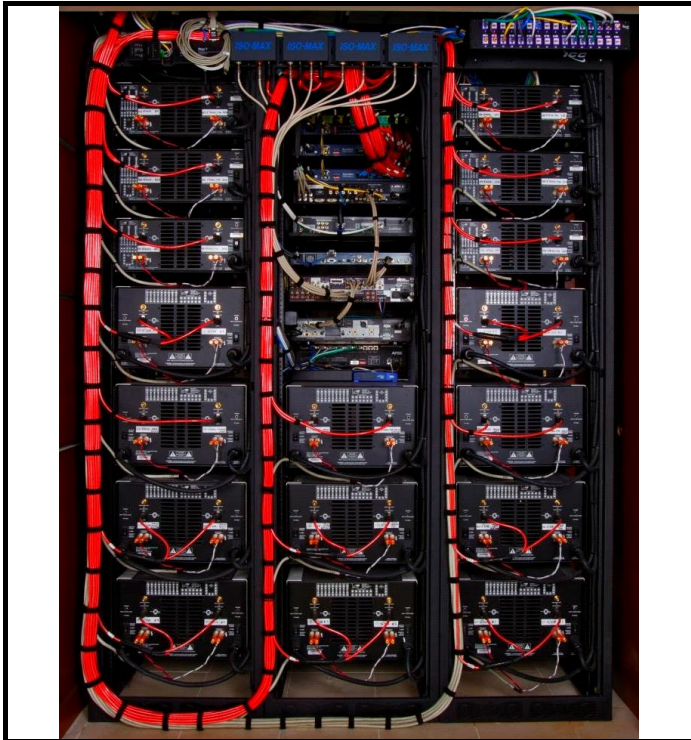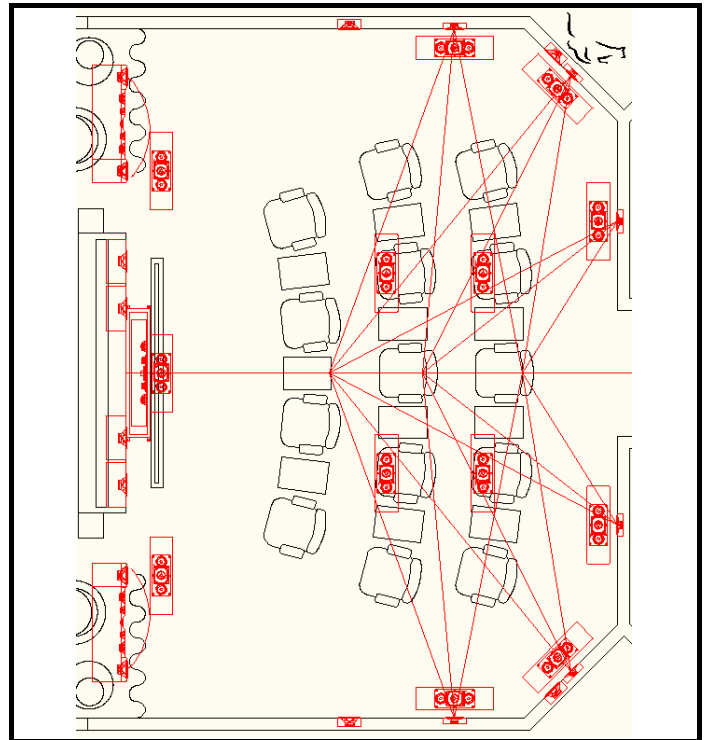




[Previous Page](#)

[Return To Product List](#)

On-Site Engineering



After your audio system is installed, CAT engineers will travel to your project anywhere in the world, and using state-of-the-art equipment and fully customized DSP programs, we will calibrate your audio system to perform at the best possible quality and output levels. CAT engineers will work with your integration team and project managers to customize any required presets or controls, such as having different EQ settings for screen masking or window shades open or closed, motorized speaker mount positions, or even different furniture configurations or listening preferences. At the client's request, the calibration will even be custom-tuned to their exact preferences. The number of days required varies by system scope, there is a minimum of two days for any system. Transportation and lodging will be billed separately.

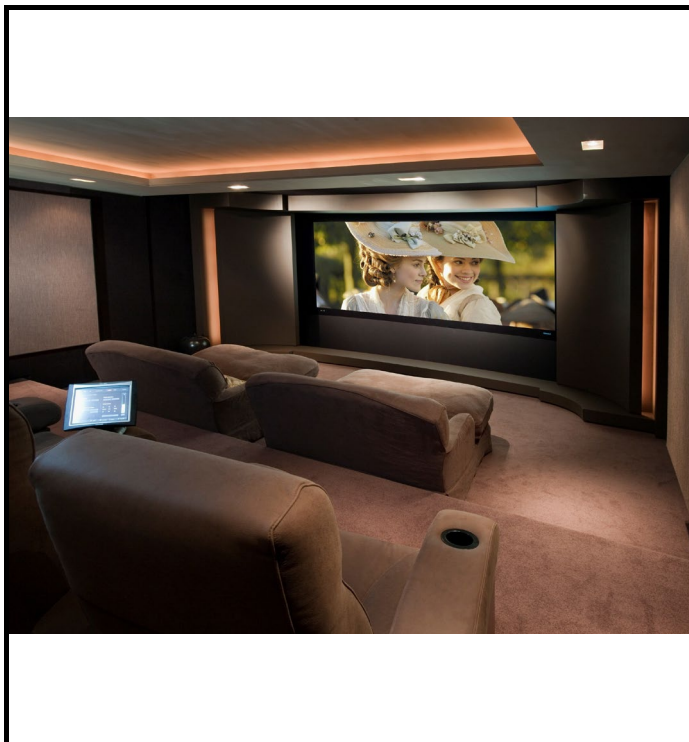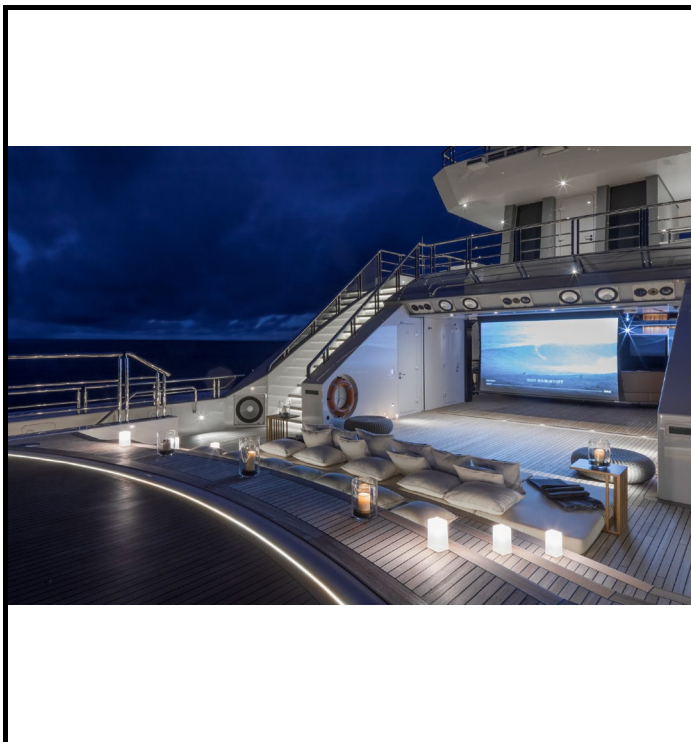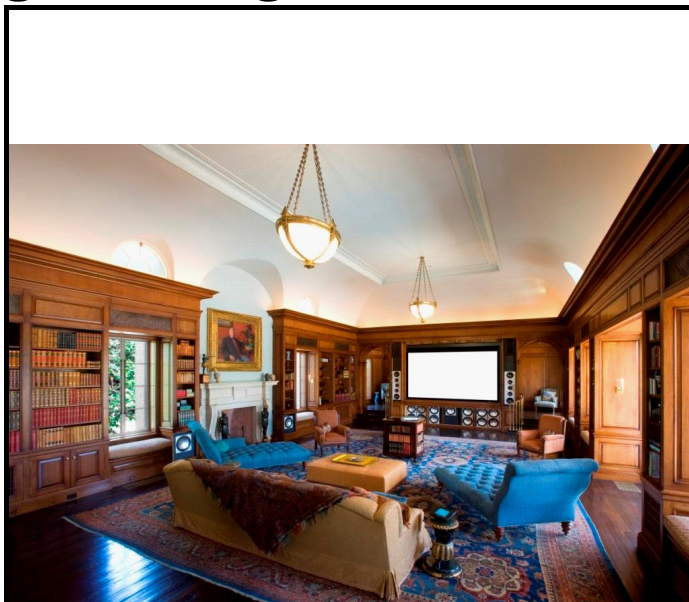


[Previous Page](#)

[Return To Product List](#)

CAT MBX DSP 12x12



The CAT MBX DSP 12x12 is a Dante-enabled, 12-XLR-input, 12-XLR-output, high power digital signal processor. With a medical-grade linear power supply, shock-isolating mainboard mounts, and a machined billet aluminum faceplate. Two ethernet ports for control system integration, two Dante I/O ports supporting 128 Dante channels, optional USB audio port, ultra-low-noise high-fidelity ADCs and DACs.

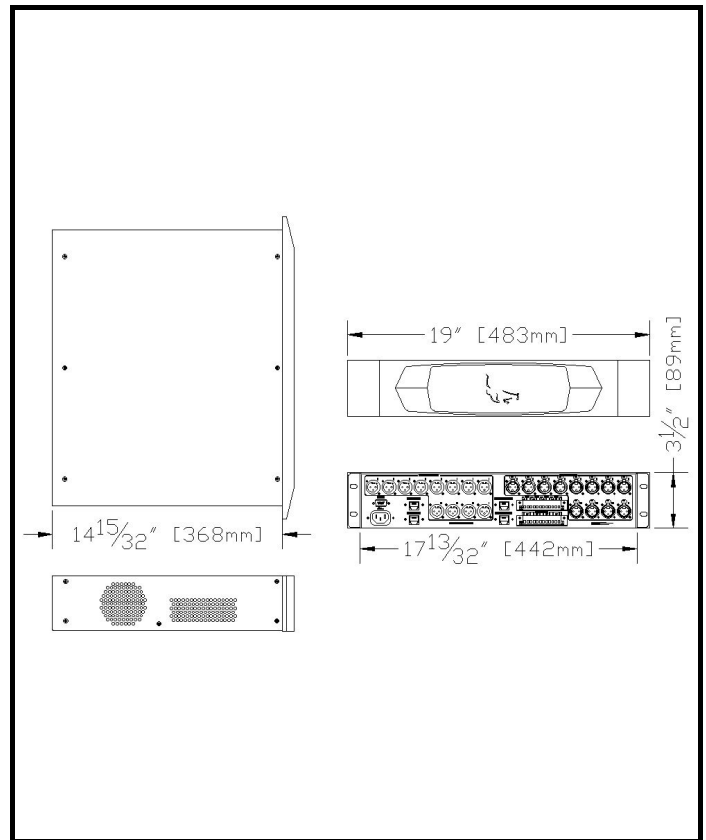

Specifications

Model
CAT MBX DSP 12x12

THD + Noise
< -95dB; 1kHz @ +15dBu

Heat Dissipation
180 BTU/Hour

Crosstalk
> -100dB from 20Hz-20kHz

Raw Processing Capacity
500 MIPS, 6 GigaFLOPS, 2 GMACS

Latency
1.04 ms

Dynamic Range (A/D/A)
114 dB, A-weighted

Mains and Power Supply
C13 (15 Amp)

Delay Memory
174 Seconds (Sum of all channels)

Inputs (Quantity and Type)
12 - XLR

Main Rating
115V 15A / 230V 8A

Outputs (Quantity and Type)
12 - XLR

Frequency Response
20Hz-20kHz +/- 0.5dB

Weight
6.3 kg

Dante I/O
64 Inputs, 64 Outputs

Dimensions (W x H x D)
483mm x 177mm x 419mm

[Previous Page](#)

[Return To Product List](#)

Soundbars



Soundbars are made to your exact specifications. Use the table to the right to determine which speaker types can fit within your constraints. Our engineers can design custom soundbars to fit virtually any requirements and desires you may have! See just a few of the possible examples below.

Grilles

All CAT soundbars are available with any type of grill you may want. Options include billet aluminum, perforated stainless steel, FR4, fabric-wrapped (with our own acoustically-transparent fabric, or any fabric provided by your team which we can test in our lab for acoustical transparency), and many other options!



[Click here to see a few grille examples](#)

Soundbar Dimensional Requirements

Model	Type	Min. Height	Min. Depth*	Min. Width	Max. Width**
CAT 100	LR (2ch)	6.5"	4.5"	24.375"	96"
CAT 200	LR (2ch)	8.25"	4.5"	30"	96"
CAT 300	LR (2ch)	5.5"	4.5"	34.25"	96"
	LCR (3ch)	5.5"	4.5"	51.375"	96"
CAT 400	LR (2ch)	6.5"	4.5"	39"	96"
	LCR (3ch)	6.5"	4.5"	58.5"	96"
CAT Elite 200EX	LR (2ch)	8.25"	4.5"	30"	96"
CAT Elite 400EX	LR (2ch)	6.5"	4.5"	42"	96"
	LCR (3ch)	6.5"	4.5"	63"	96"
CAT Elite 706	LR (2ch)	5.5"	4.5"	39"	96"
	LCR (3ch)	5.5"	4.5"	58.5"	96"
CAT Elite 700	LR (2ch)	6.5"	4.5"	42"	96"
	LCR (3ch)	6.5"	4.5"	63"	96"
CAT Elite Soundbar	LR (2ch)	4.875"	3.125"	36"	96"
	LCR (3ch)	4.875"	3.125"	54"	96"

*Minimum depth includes faceplates & driver excursion, but excludes grill

** For shipping reasons, maximum width for a 1-piece soundbar is 96". If more width is desired, CAT can manufacture a 2 or 3 piece soundbar.

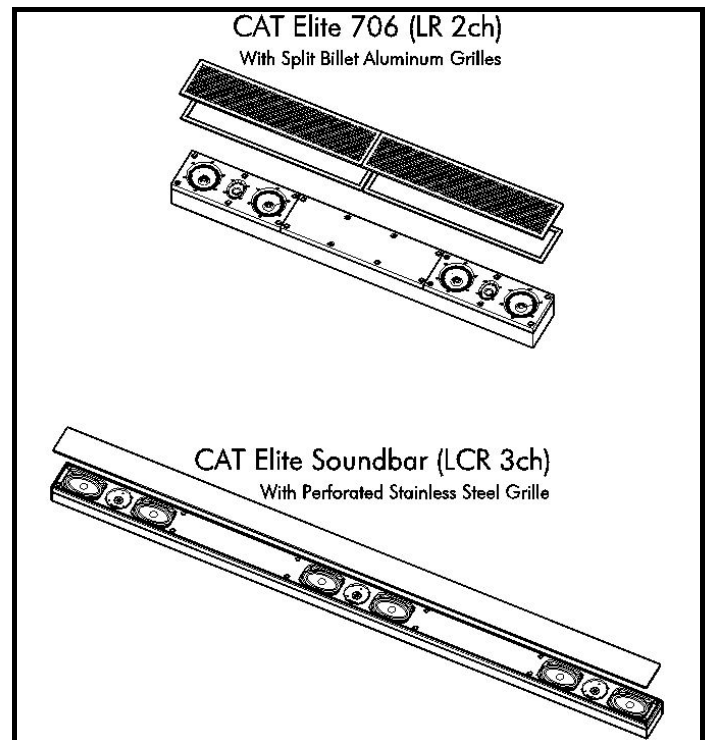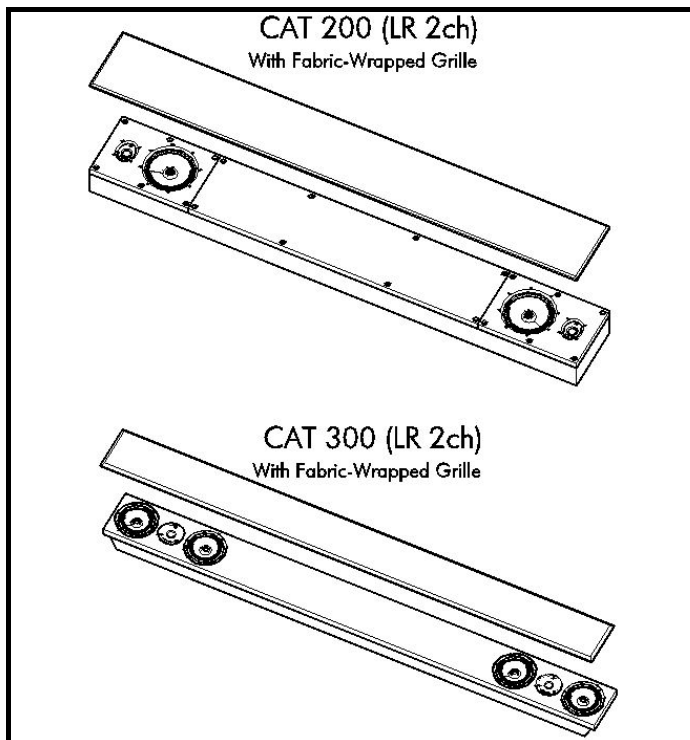

[Previous Page](#)

[Return To Product List](#)

Two-Channel Systems



These Two-Channel systems include the loudspeakers, subwoofers, amplifier, and DSP (if applicable) for a complete stereo audio system. Any of these systems can be customized to meet any budget or desire, just ask the CAT sales team for details of all your various options and pricing. Pricing shown here excludes audio source equipment, preamplifier, and cables/wires, taxes/duties, and travel.

Coronado

2	CAT Coronado Loudspeakers	\$7,900
2	CAT San Andreas 12" Subwoofers	\$9,000
1	CAT 200.6 Amplifier	\$9,995

DSP not included, requires a preamp capable of frequency-dividing

Total	\$26,895
--------------	-----------------

Mendocino

2	CAT Elite Mendocino Loudspeakers	\$73,200
1	CAT 300.8 Amplifier	\$24,000
1	CAT MBX DSP 12x12	\$22,150
2	Days of On-Site Engineering	\$15,000

Total	\$134,350
--------------	------------------

Sequoia

2	CAT MBX Sequoia Loudspeakers	\$403,400
2	CAT MBX Diablo 22" Subwoofers	\$181,400
5	CAT MBX 1250.2 Amplifiers	\$219,250
1	CAT MBX DSP 12x12	\$22,150
2	Days of On-Site Engineering	\$15,000

Total	\$841,200
--------------	------------------

[Previous Page](#)

[Return To Product List](#)

Cinema Systems



These Cinema systems include the loudspeakers, subwoofers, amplifiers, and DSP (if applicable) for a complete cinema audio system. Any of these systems can be customized to meet any budget or desire, just ask the CAT sales team for details of all your various options and pricing. Pricing shown here excludes custom charges, audio source equipment, preamplifier, and cables/wires, taxes/duties, and travel.

CAT 7.1

3	CAT 300 IW	\$9,900
2	CAT S2 IW	\$8,300
4	CAT 100 IW	\$7,800
2	CAT 200.6 Amplifiers	\$19,990

*DSP not included, all signal processing
to be done in cinema preamp*

Total	\$45,990
--------------	-----------------

CAT Elite 7.4.1 Atmos

3	CAT Elite 700 IW	\$29,850
4	CAT S4 IW	\$29,000
6	CAT Elite 400EX IW	\$36,300
4	CAT Elite 200EX IW	\$15,800
4	CAT Elite S5 IW	\$25,800
3	CAT 300.8 Amplifier	\$72,000
2	CAT MBX DSP 12x12	\$44,300
2	Days On-Site Engineering	\$15,000
8	Hours Off-Site Engineering	\$2,000

Total	\$270,050
--------------	------------------

CAT MBX 15.8.1 Pro Atmos

3	CAT MBX 1000 IW	\$85,050
6	CAT MBX S8 IW	\$38,700
8	CAT MBX S11 IW	\$256,000
12	CAT Elite 700 IW	\$119,400
8	CAT Elite 200EX IW	\$31,600
6	CAT S3 IW	\$34,200
10	CAT MBX 1250.2 Amplifiers	\$438,500
4	CAT 300.8 Amplifiers	\$96,000
4	CAT MBX DSP 12x12	\$88,600
3	Days On-Site Engineering	\$22,500
16	Hours Off-Site Engineering	\$4,000

Total	\$1,214,550
--------------	--------------------

[Previous Page](#)

[Return To Product List](#)